THOMSON CONSUMER ELECTRONICS

Service

NORDMENDE THOMSON TECHNOLOGY · SABA · TELEFUNKEN · THOMSON

FERNSEHEN
TELEVISION
TÉLÉVISION

Bestell-Nr. 102.703.20

Chassis ICC 8

ICC 8439 U / ICC 8602 U
ICC 8606 U / ICC 8626 U

Service-Lageplan · Layout diagram · Disposition des régleurs
Posizione regulatori di servizio · Situation de los ajustes

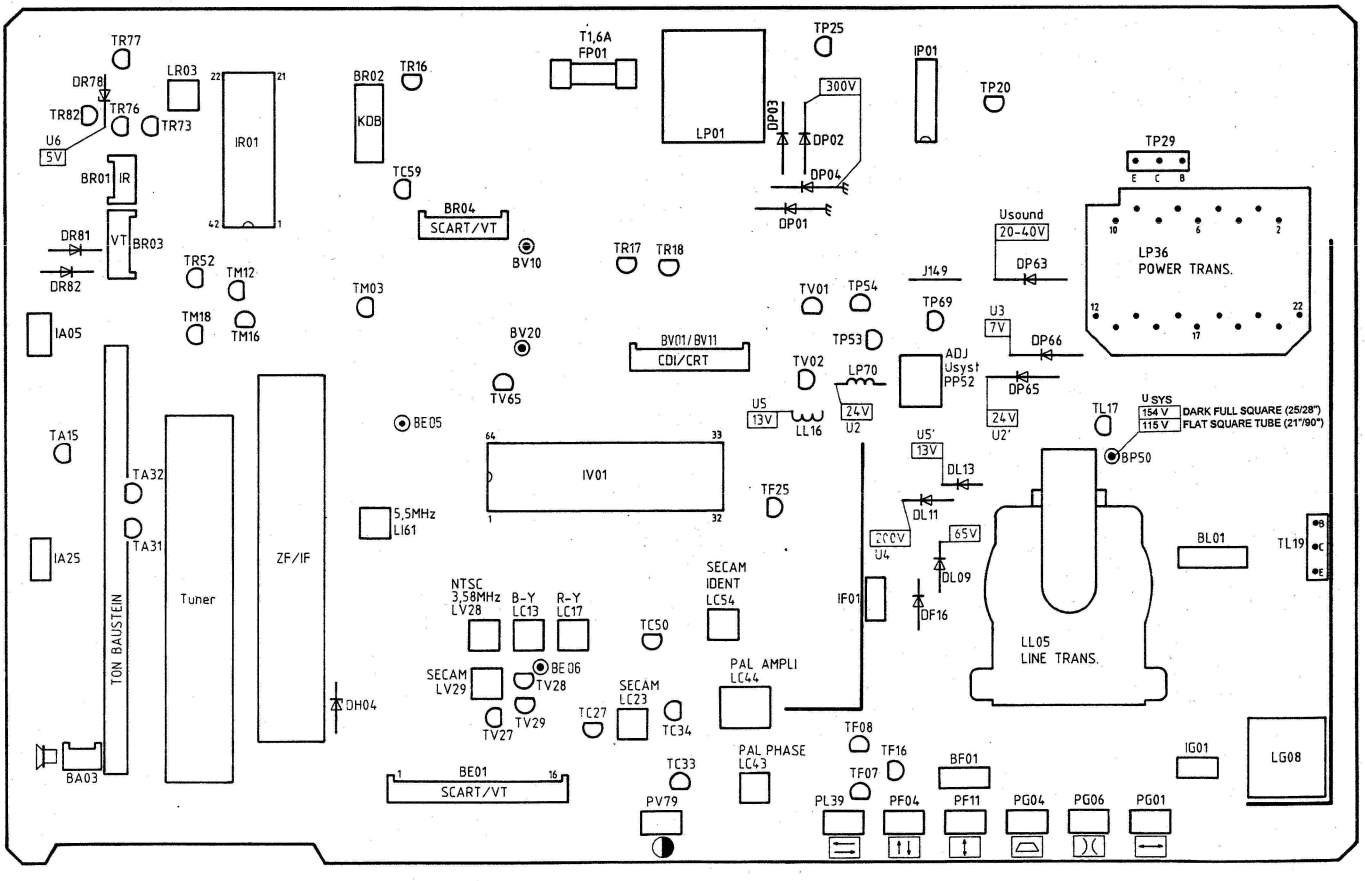

Bildröhrenplatte · Picture tube board · Platine tube image · Basetta Cinescopio · Placa de tubo de imagen

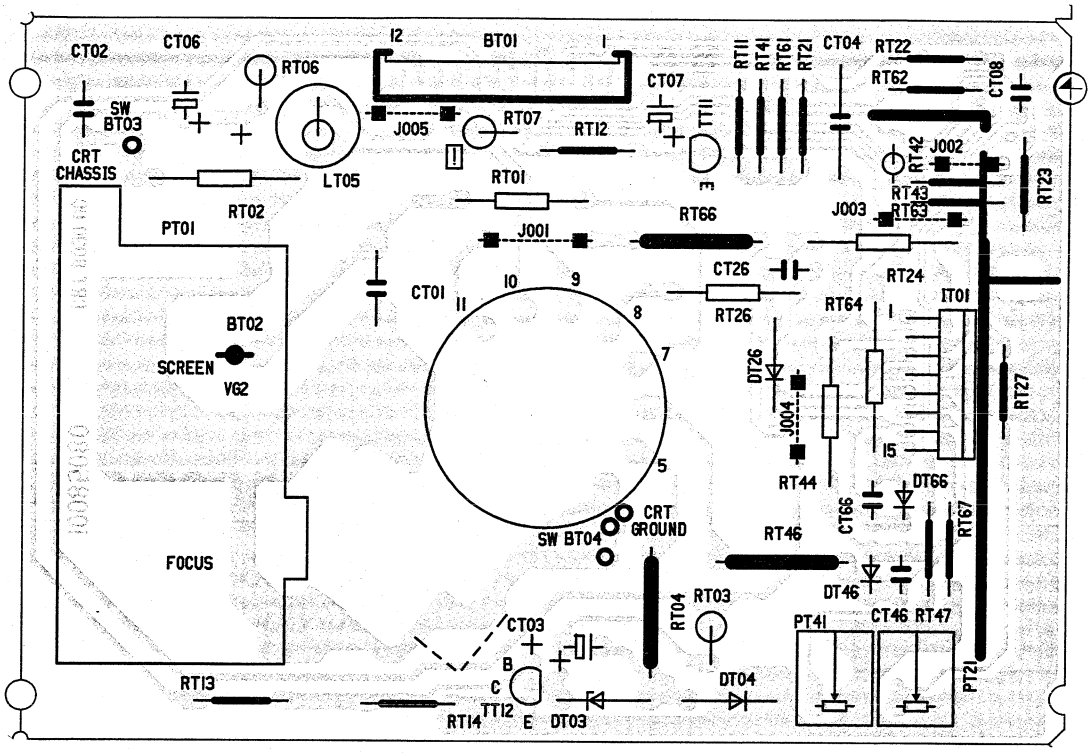

SUB VIDEO 8100/8110

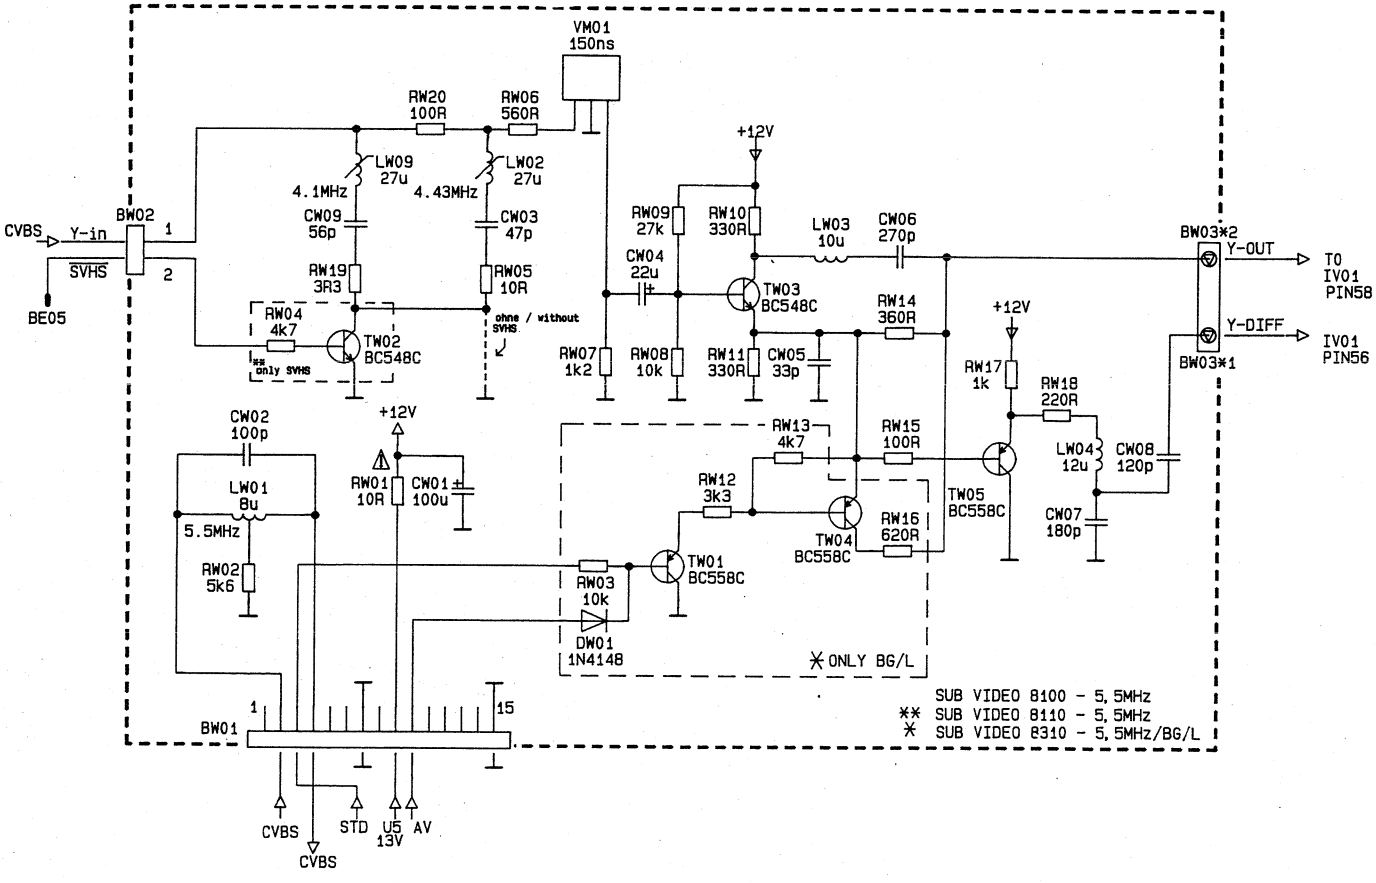

Chassis-Grundplatte · Chassis base board · Plaque de base du chassis · Piastra base telaio · Chasis placa base

Lötseite · Solder side · Côté soudure · Lato saldature · Lado soldaduras

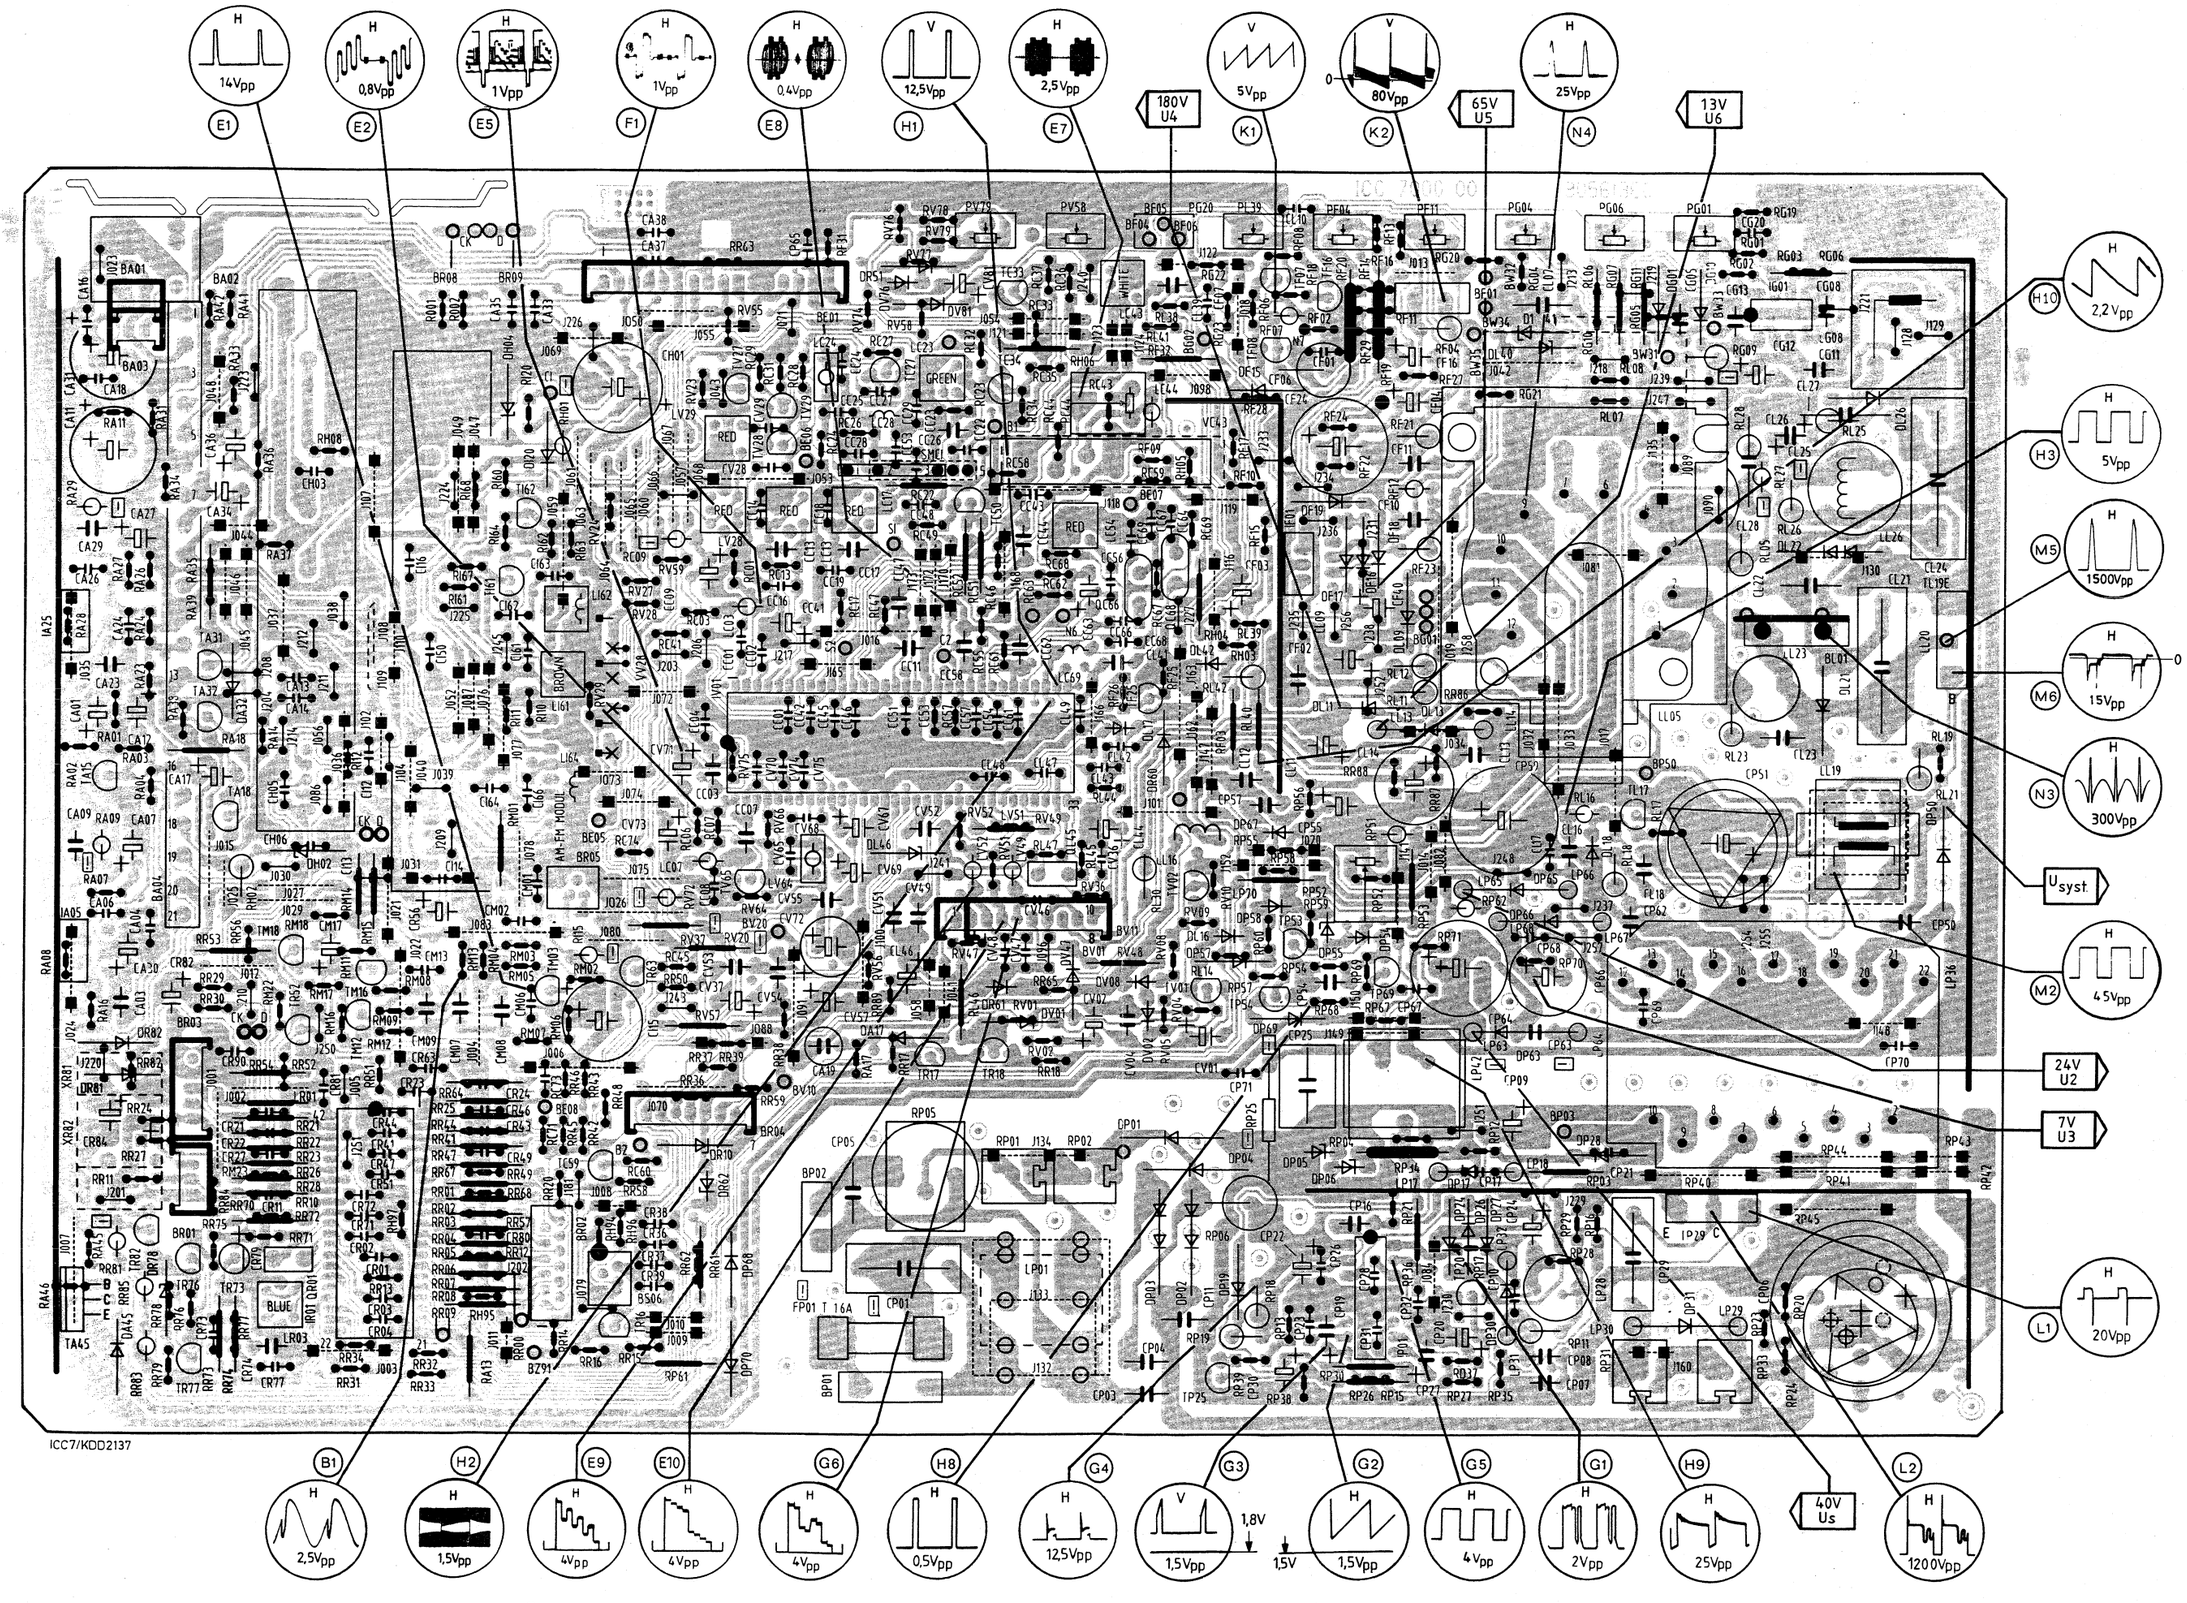

Videotext-Decoder
Teletext Decoder
Décodeur Vidéotexte
Decoder Televideo
Descodificador Teletexto

DVT 2012 SVHS
DVT 2013 SVHS/16:9
DVT 2014

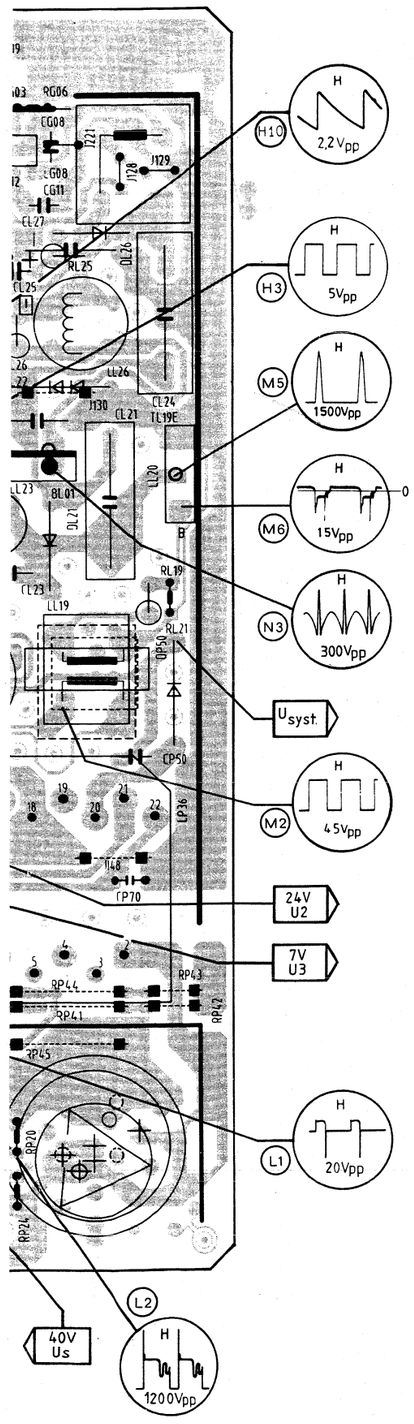

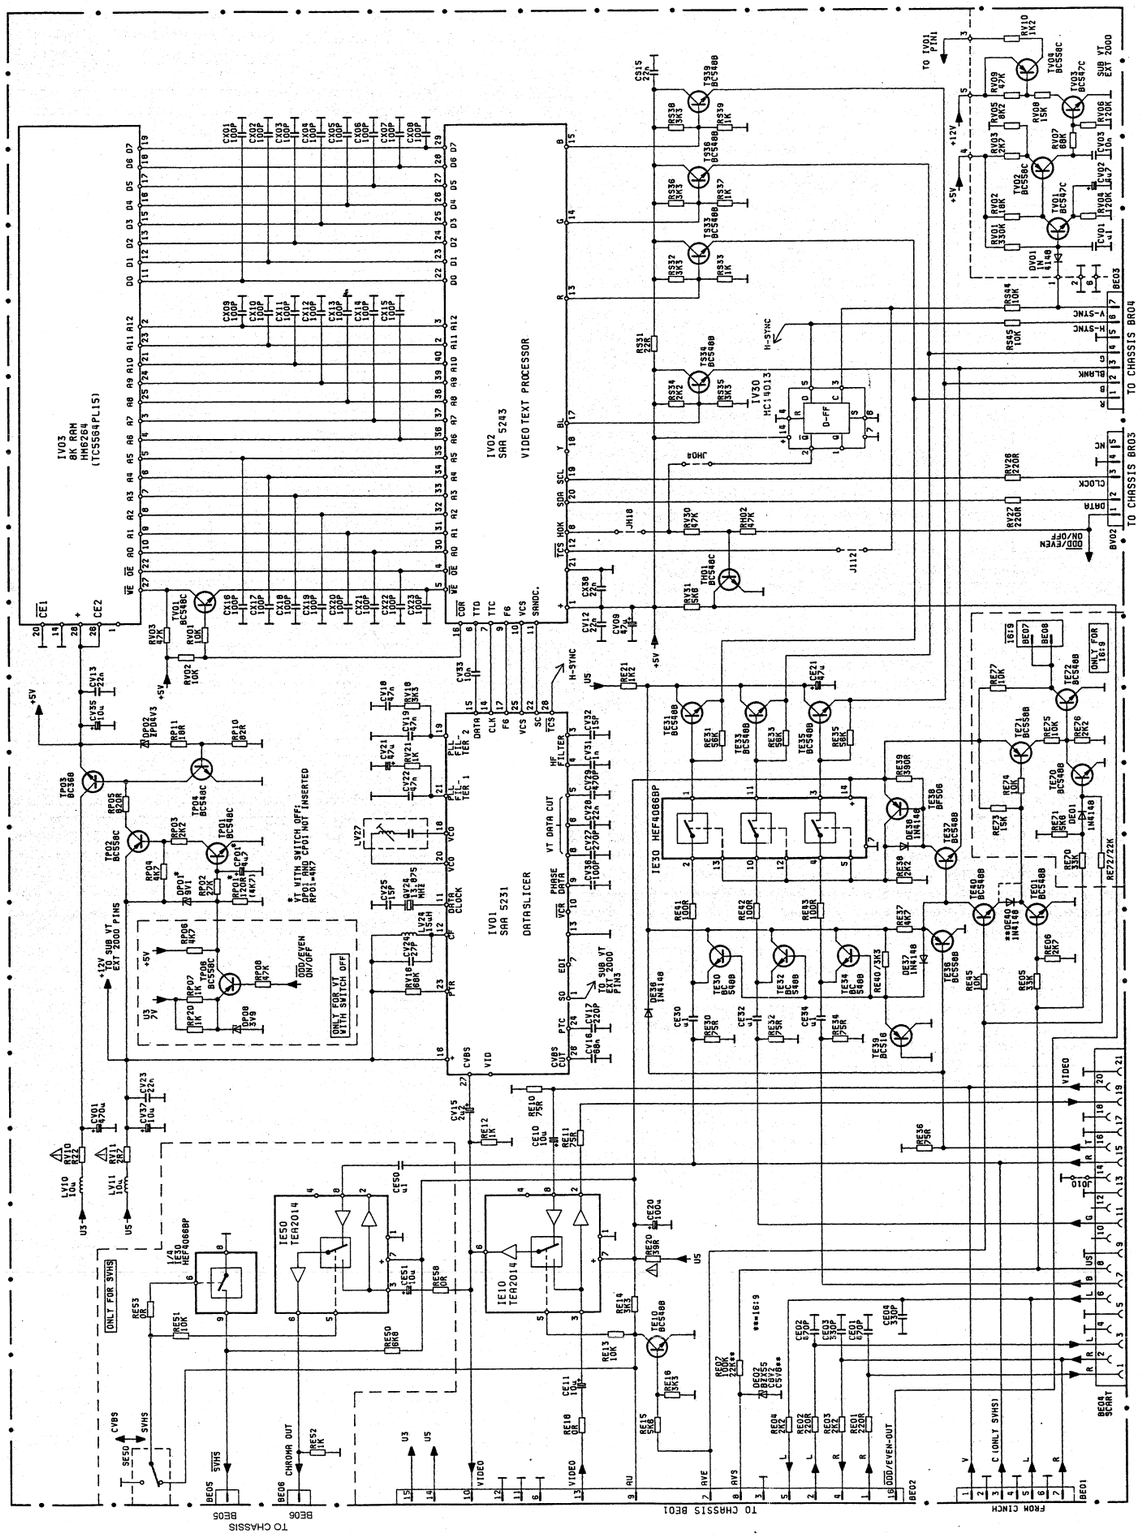

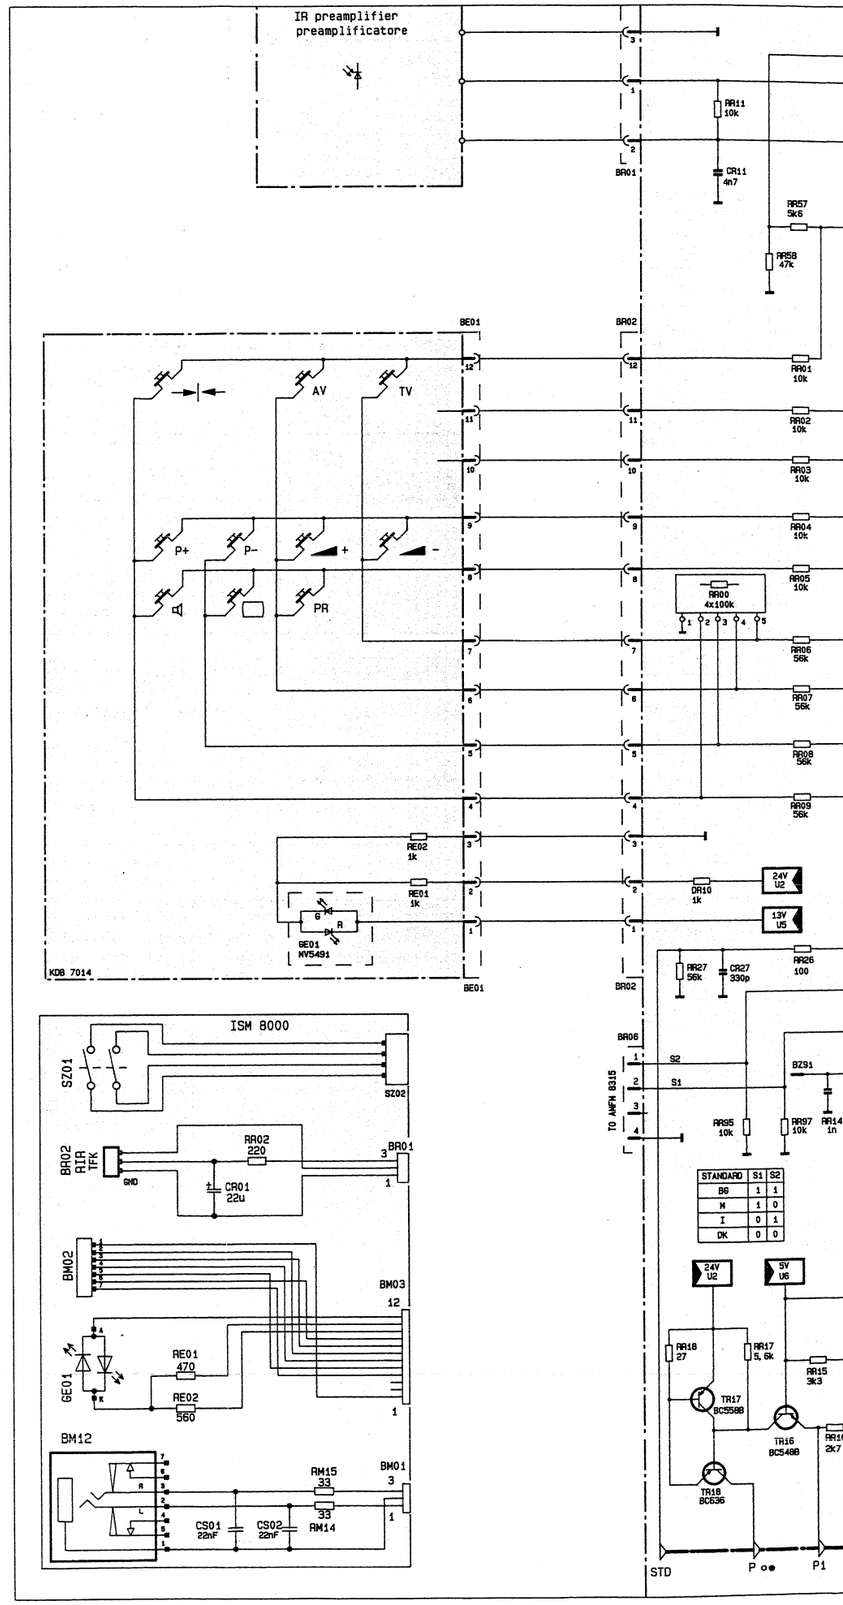

2 SVHS
3 SVHS/16:9
4

Chassis ICC 8

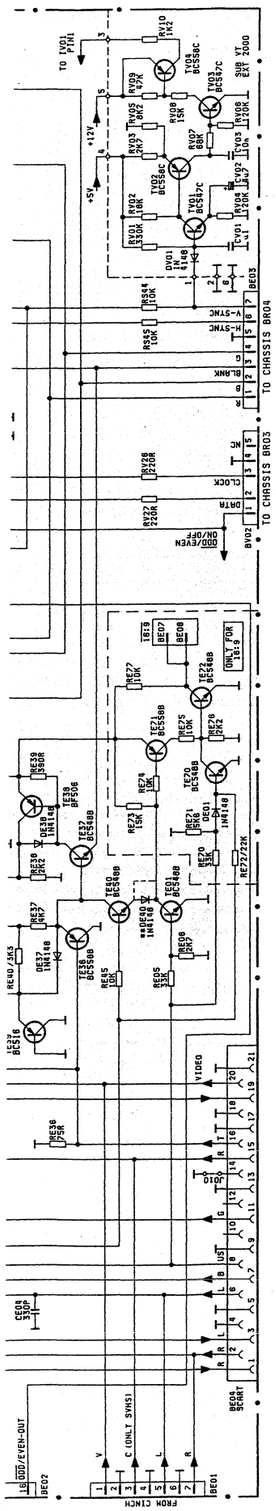

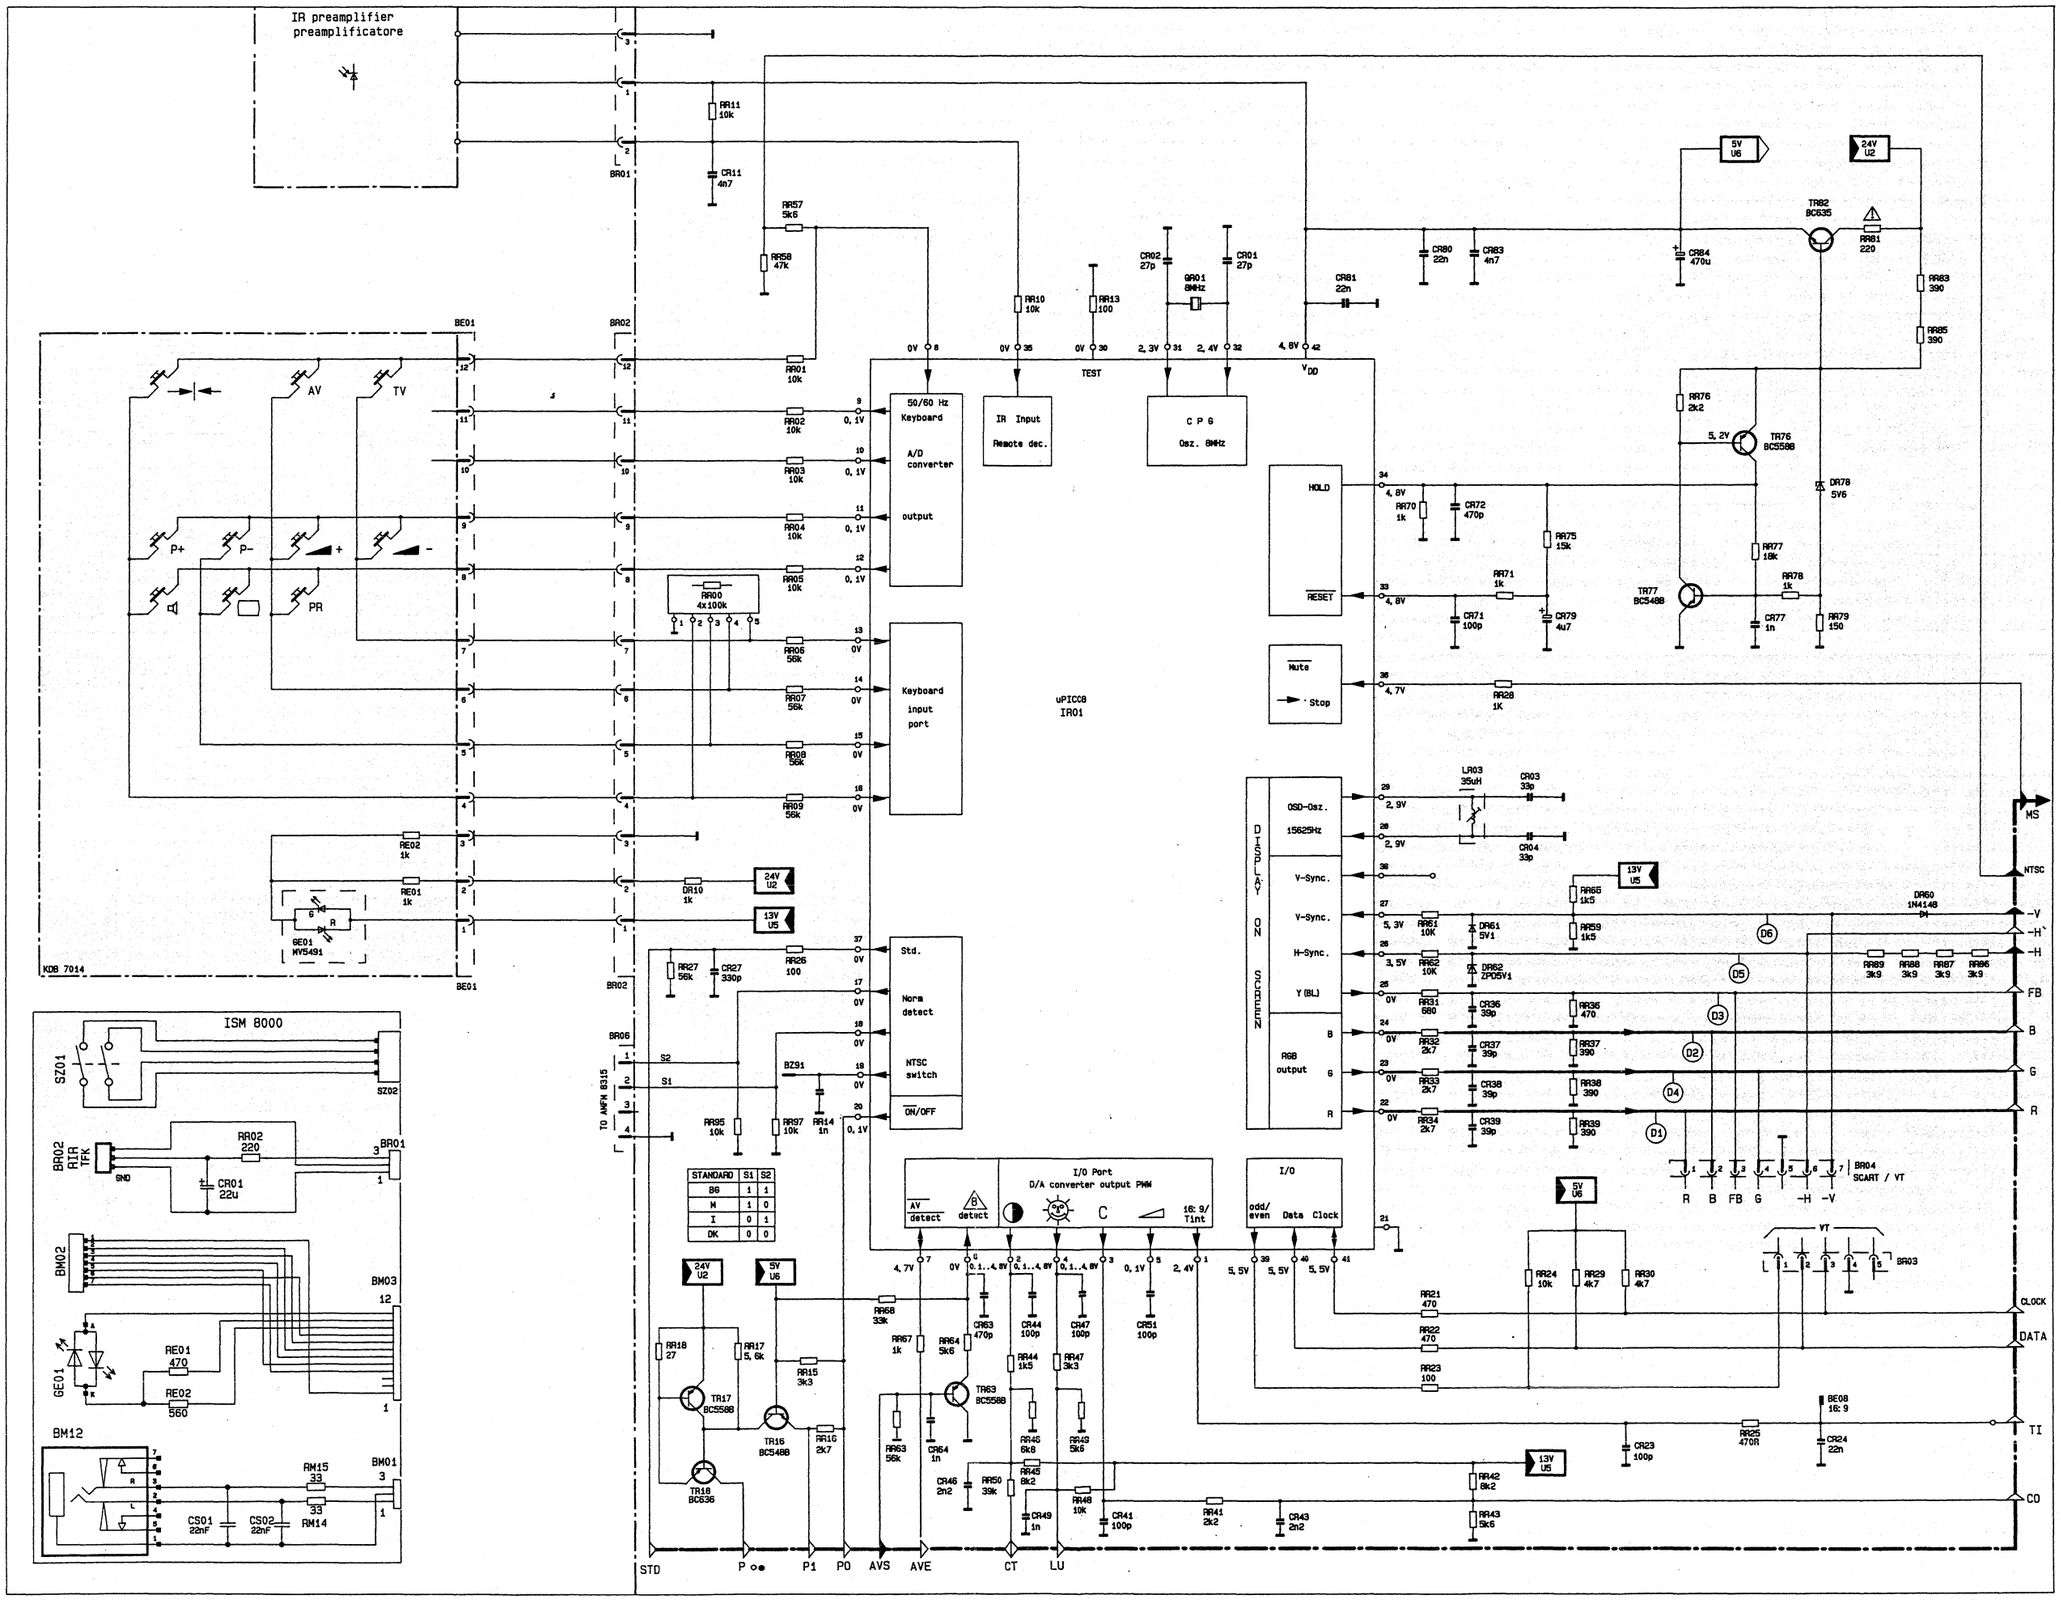

Chassis ICC 8

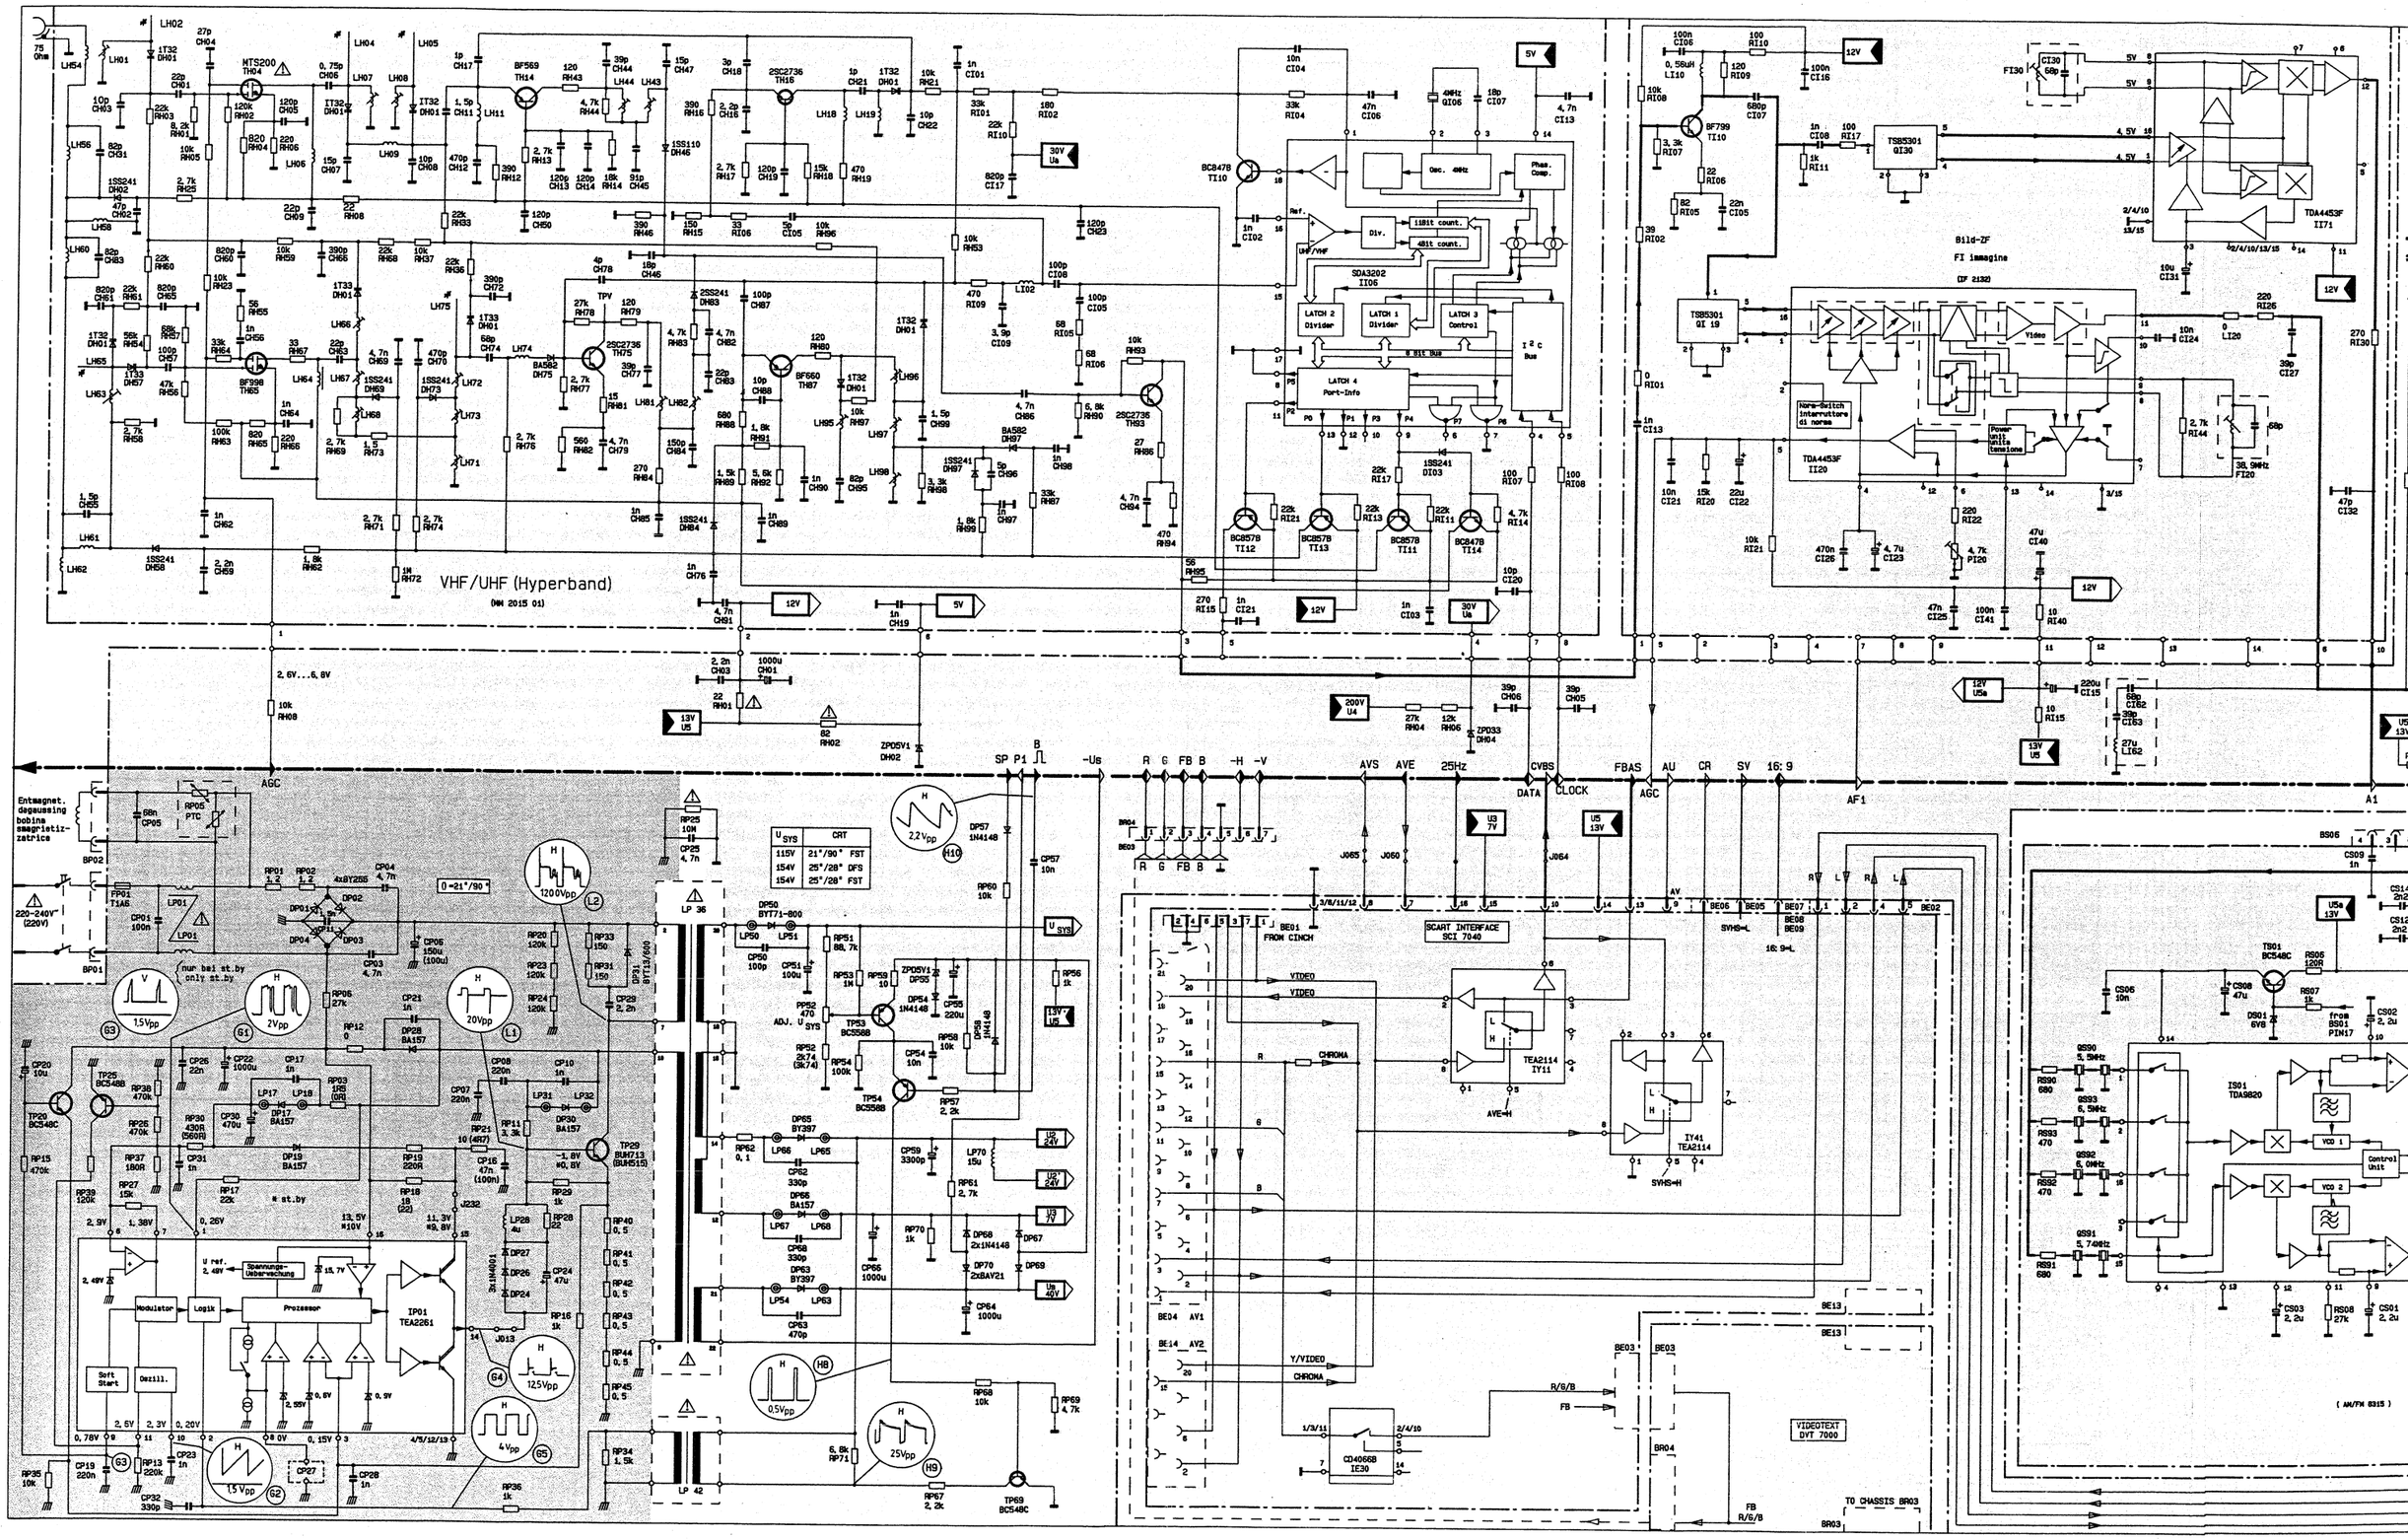

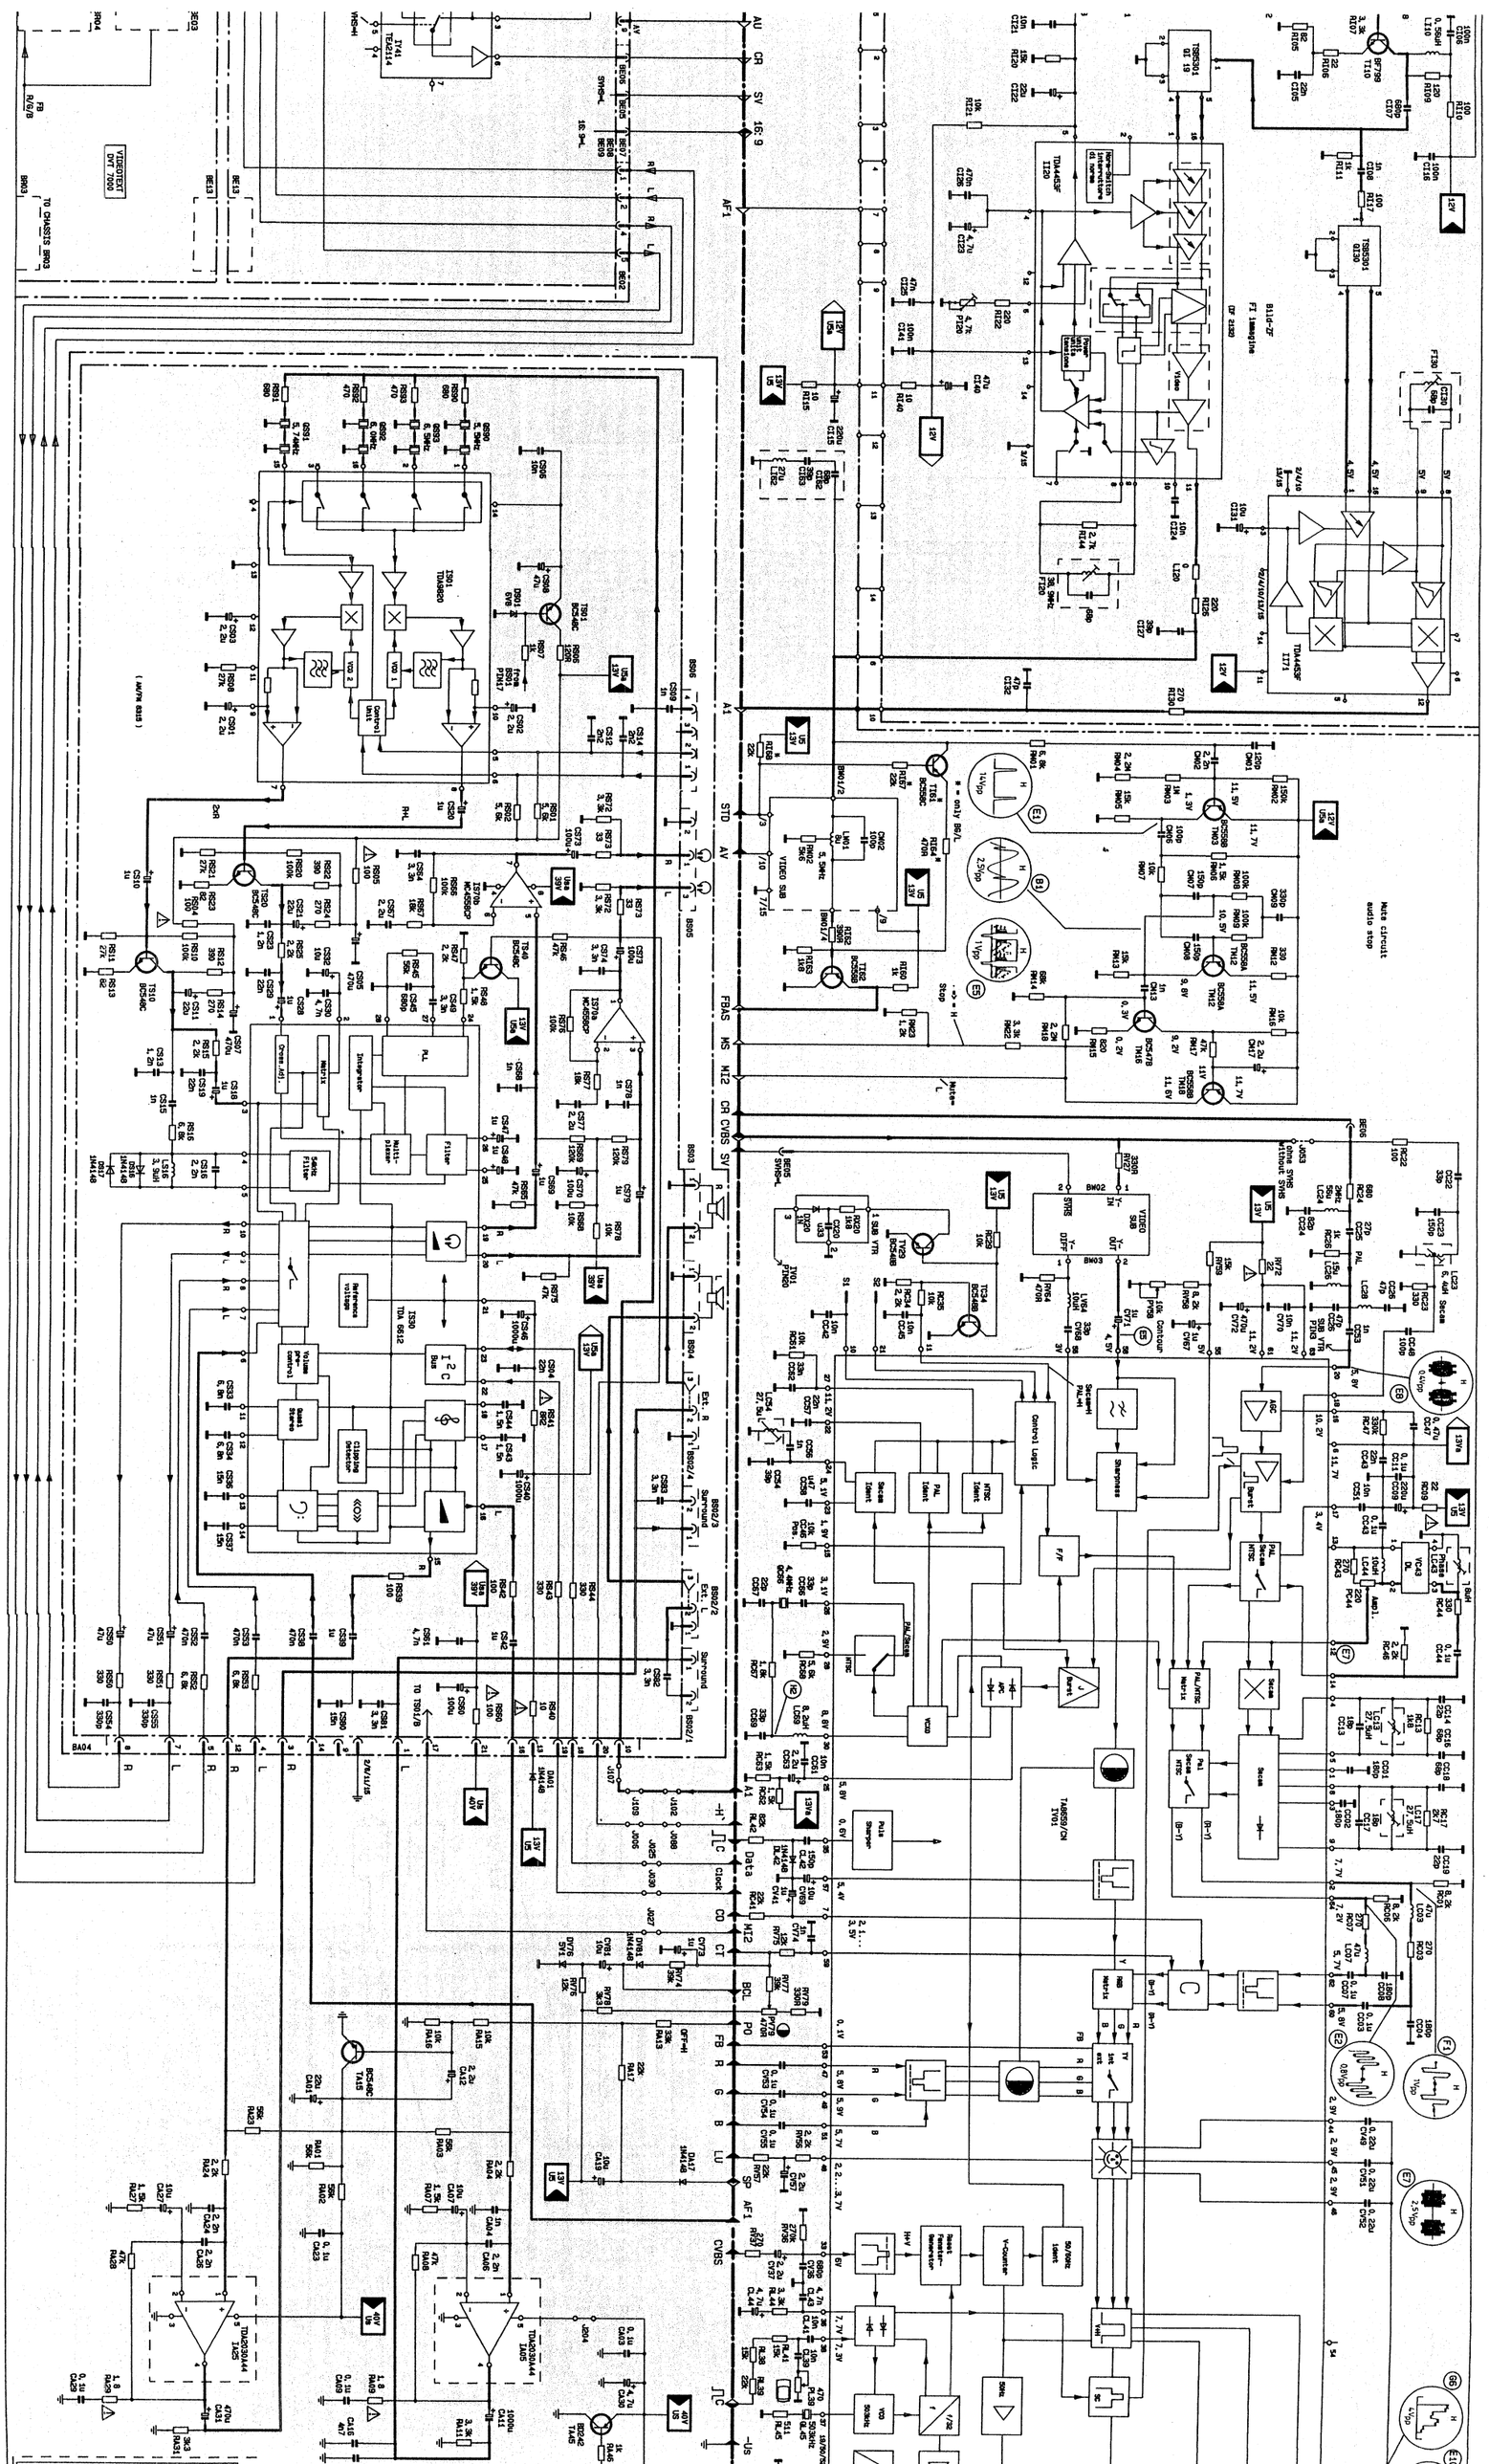

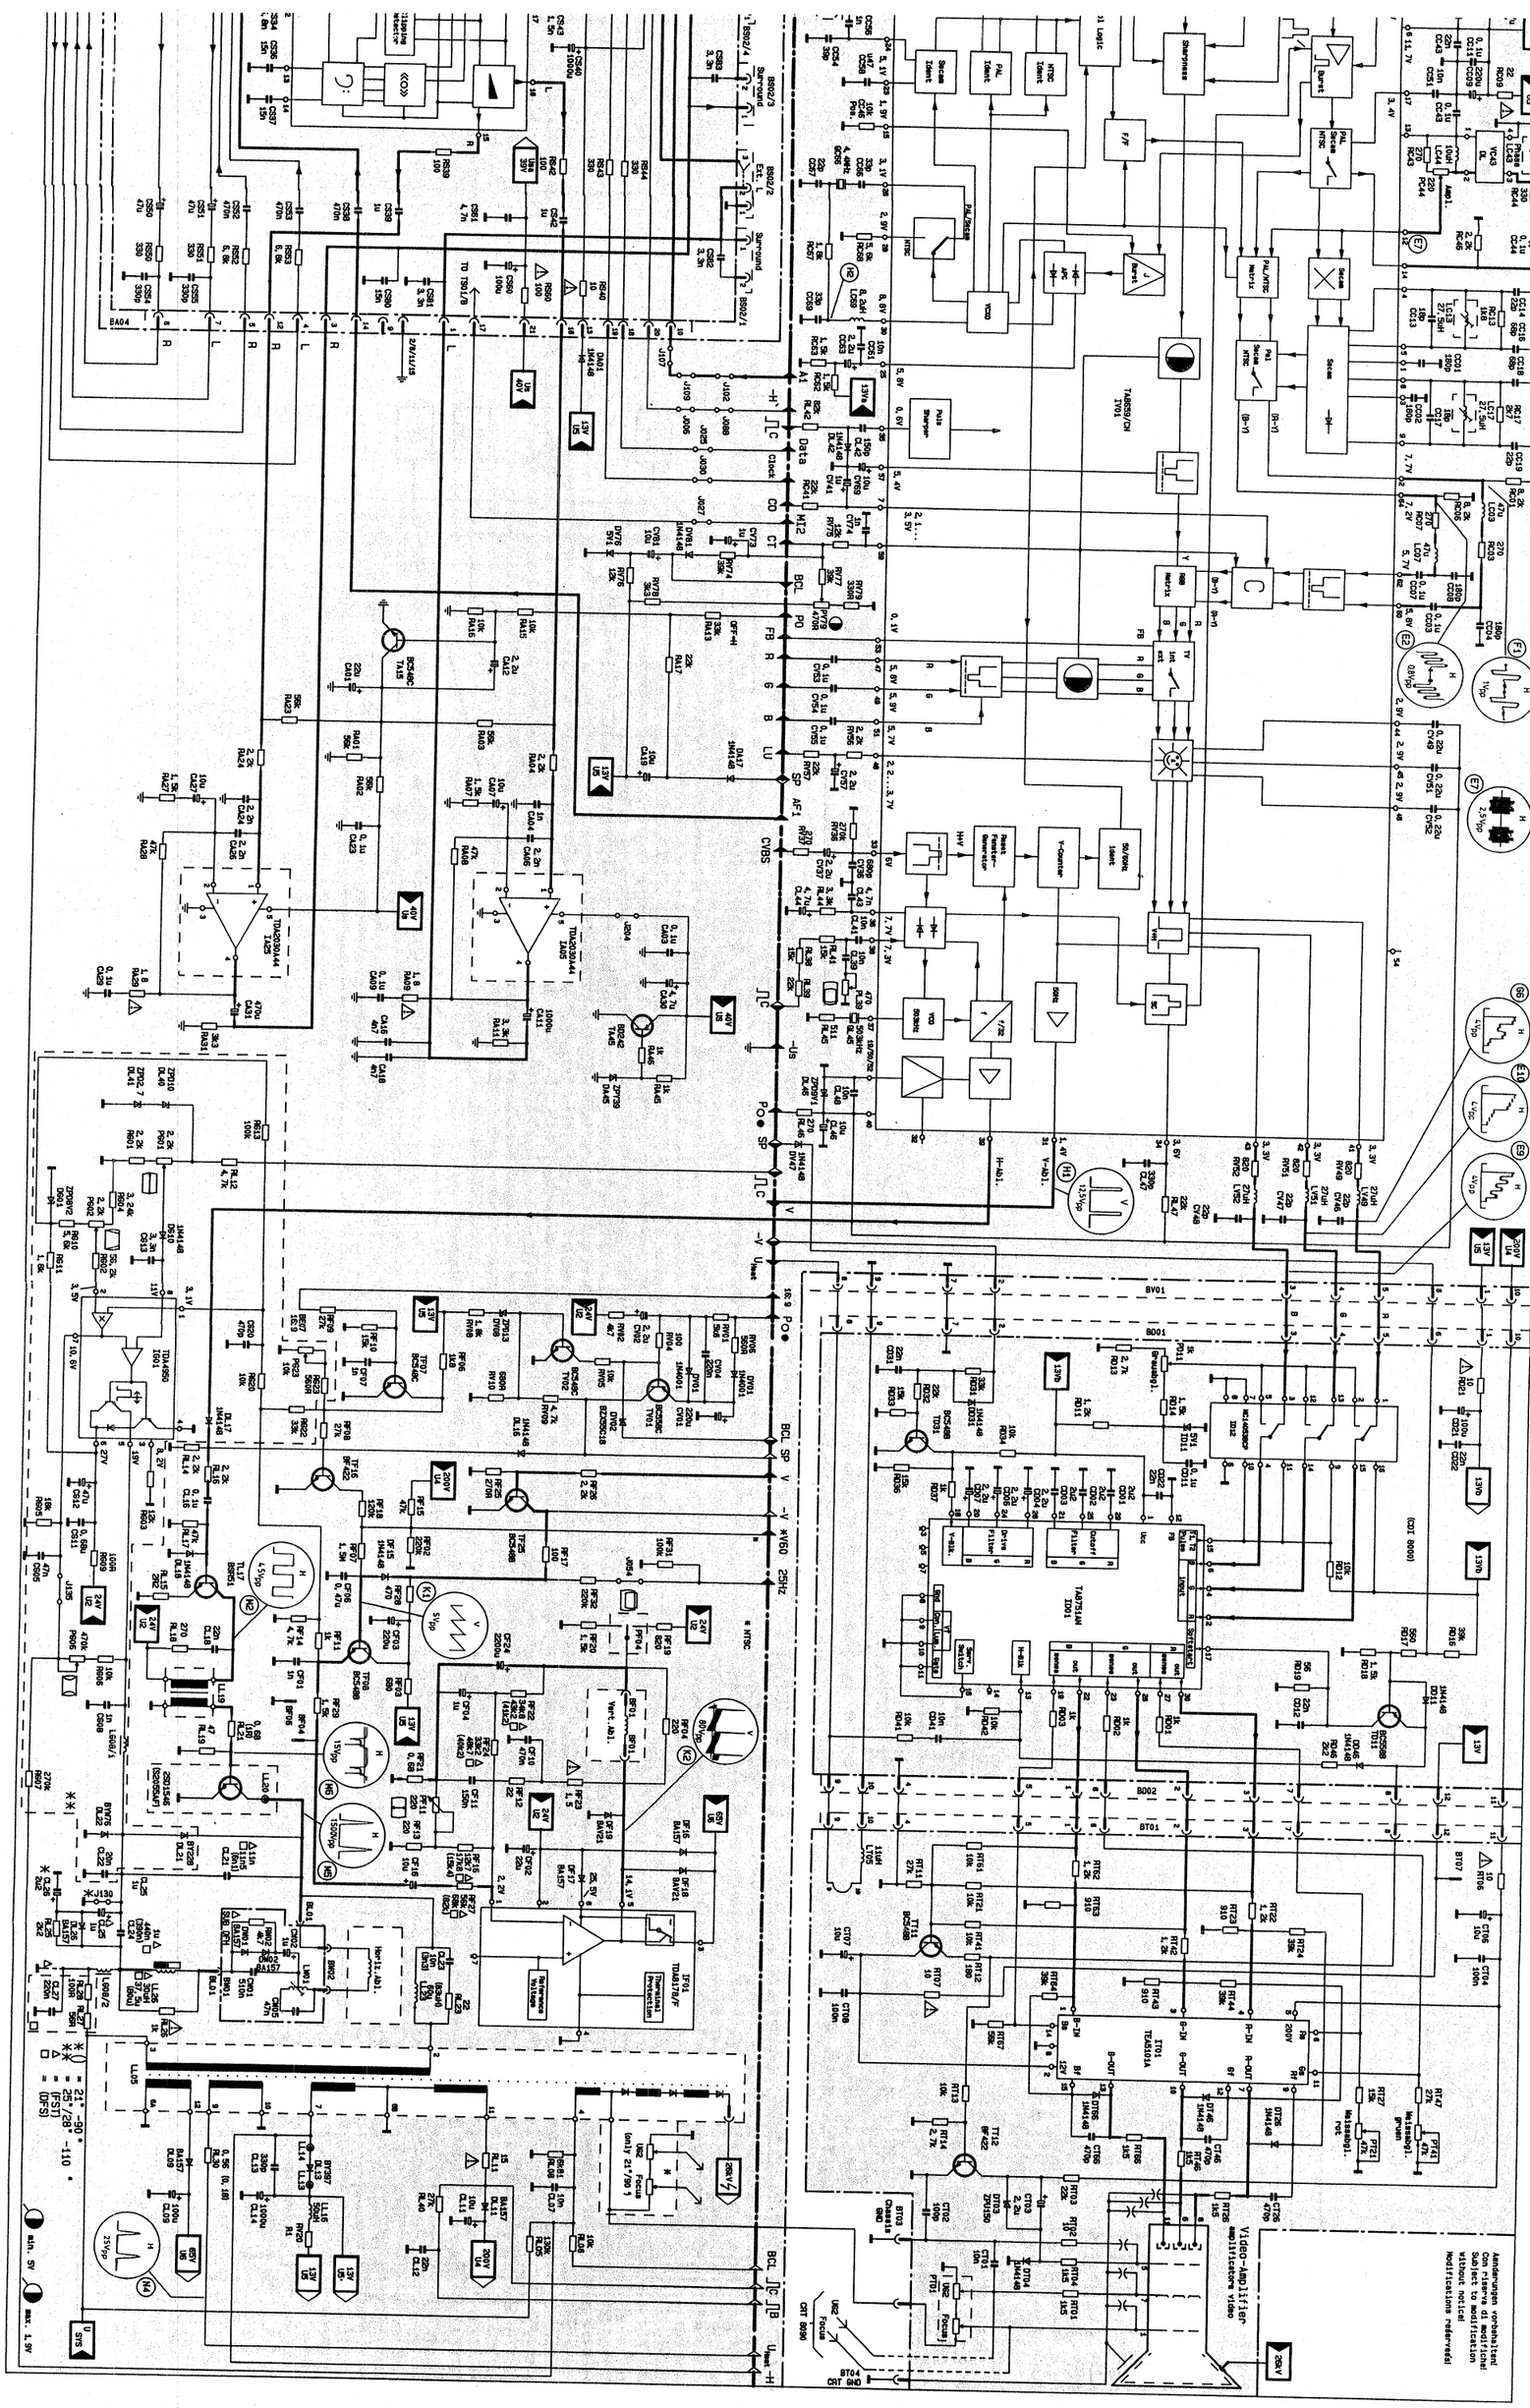
Video-Amplifier
Videoverstärker
Amplificatore video
Modifications reserved
Subject to modification
Con riserva di modifiche
Änderungen vorbehalten
CRT GND
Focus
Screen
Uhor
Uver
-Ujs
-V
V
SP
BCL
Po
Ic
B
Ujs
Uhor
-H
Uver
Ujs
Uhor
-V
V
SP
BCL
Ic
B
Uhor
-H
Uver
-

Scart-Anschluß SCI 7040 · Scart Interface · Module Péritélévisione · Modulo Scart

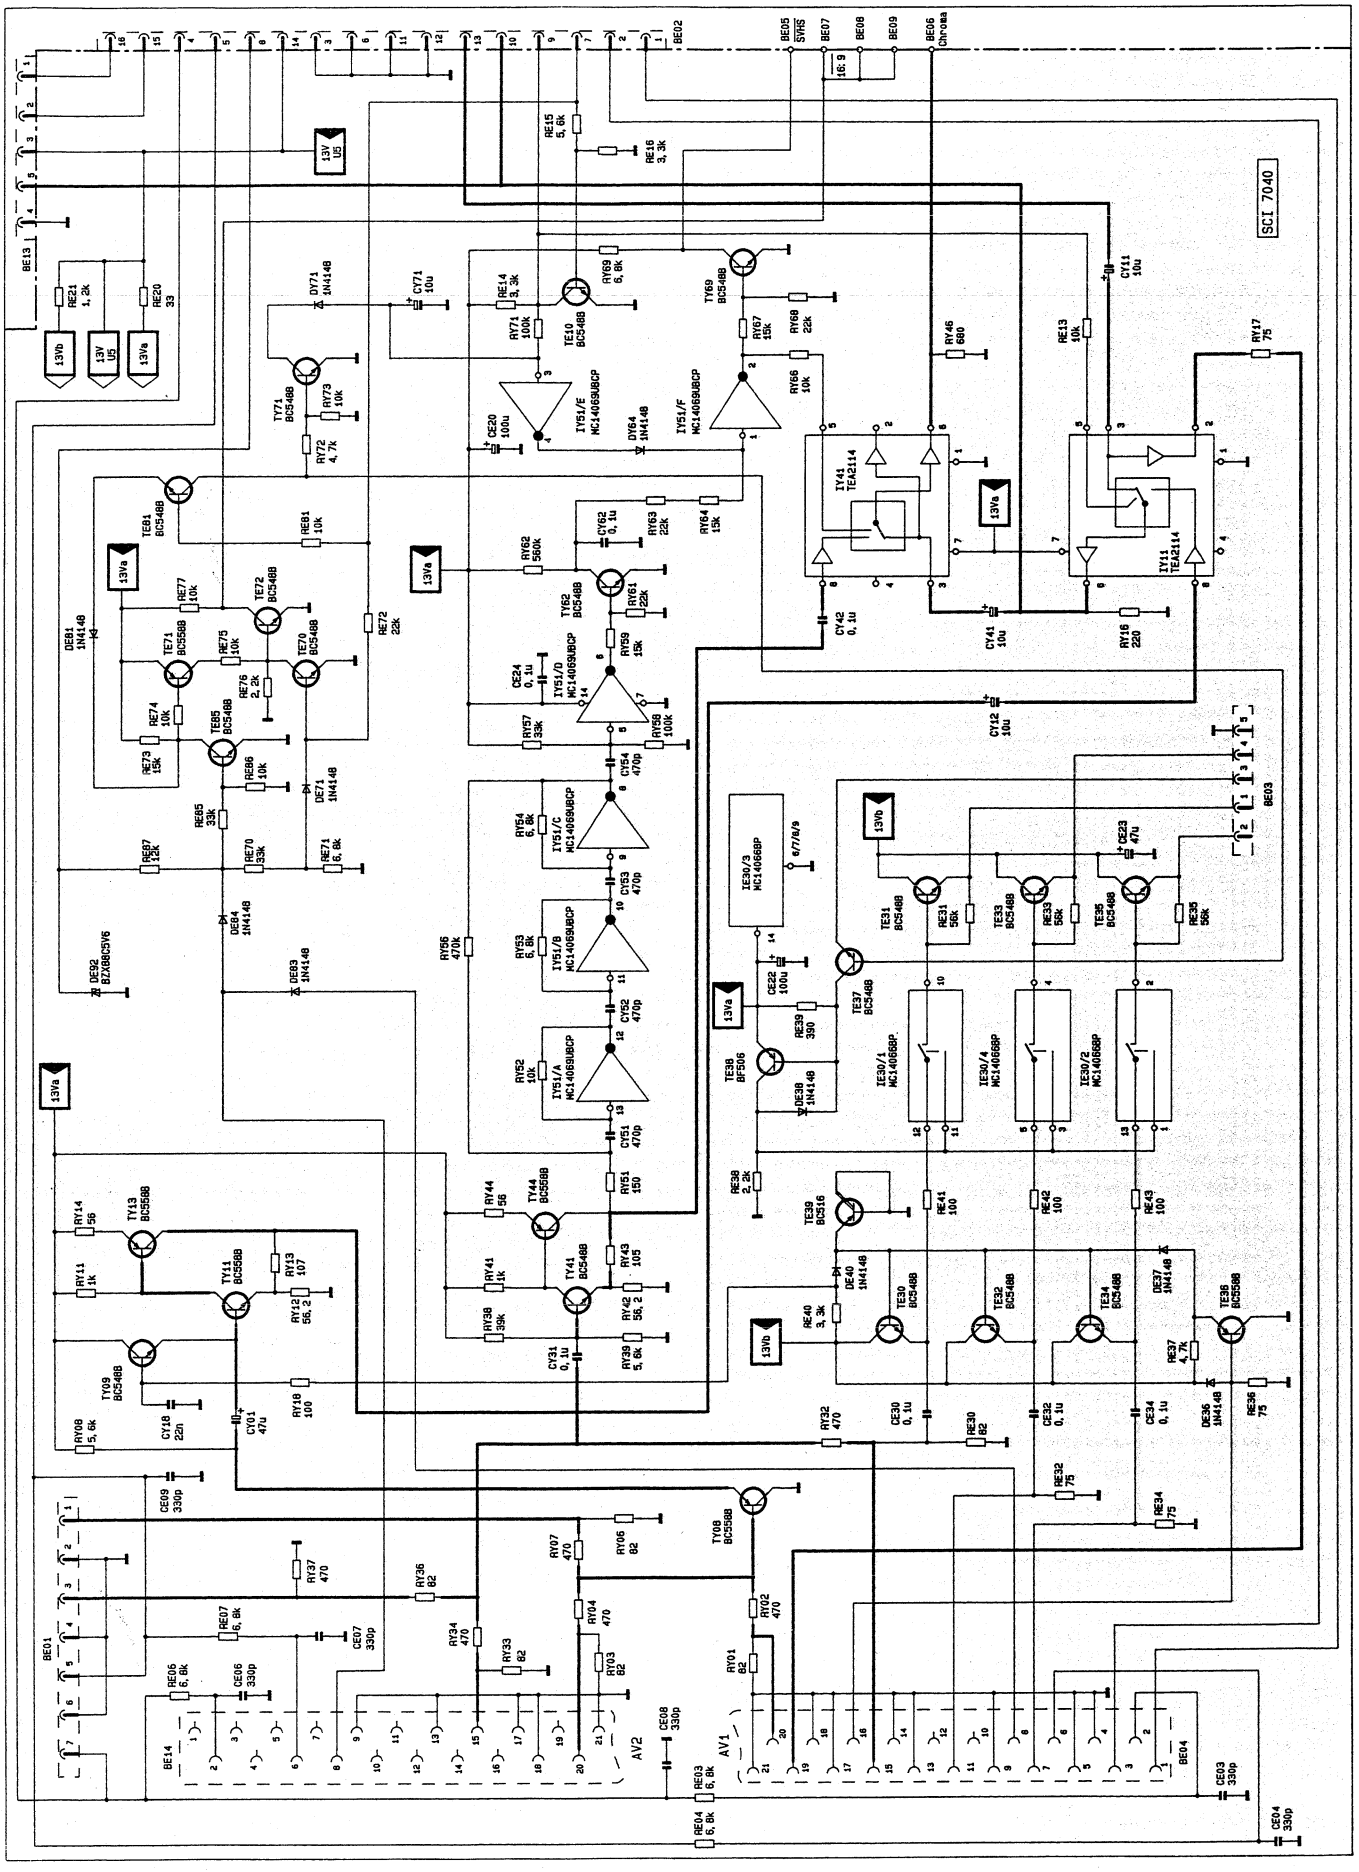

Videotext-Decoder DVT 7000 · Teletext Decoder · Décodeur Vidéotexte · Decoder Televideo · Descodificador Teletexto

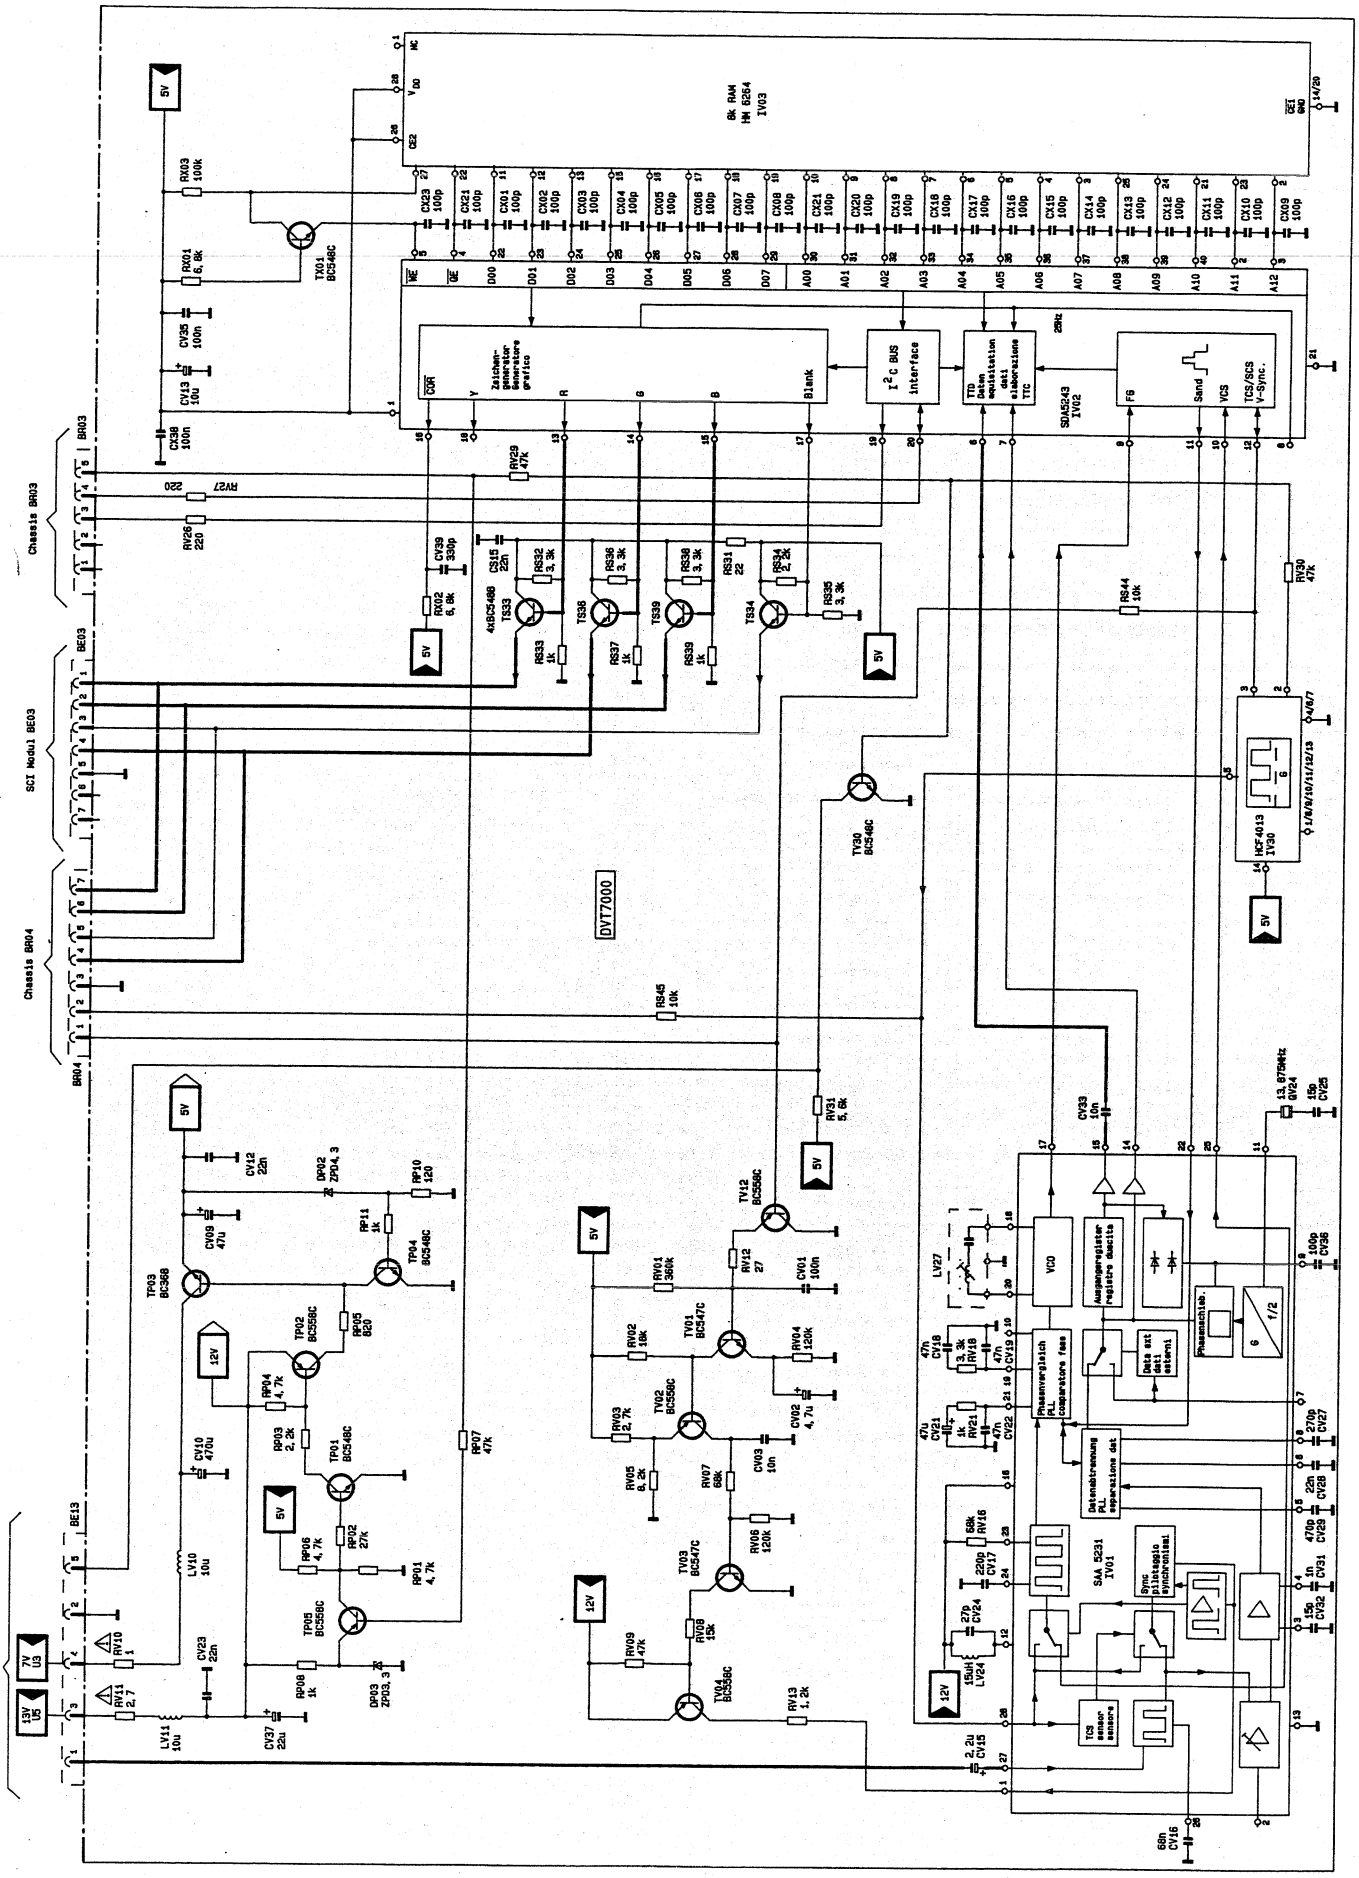

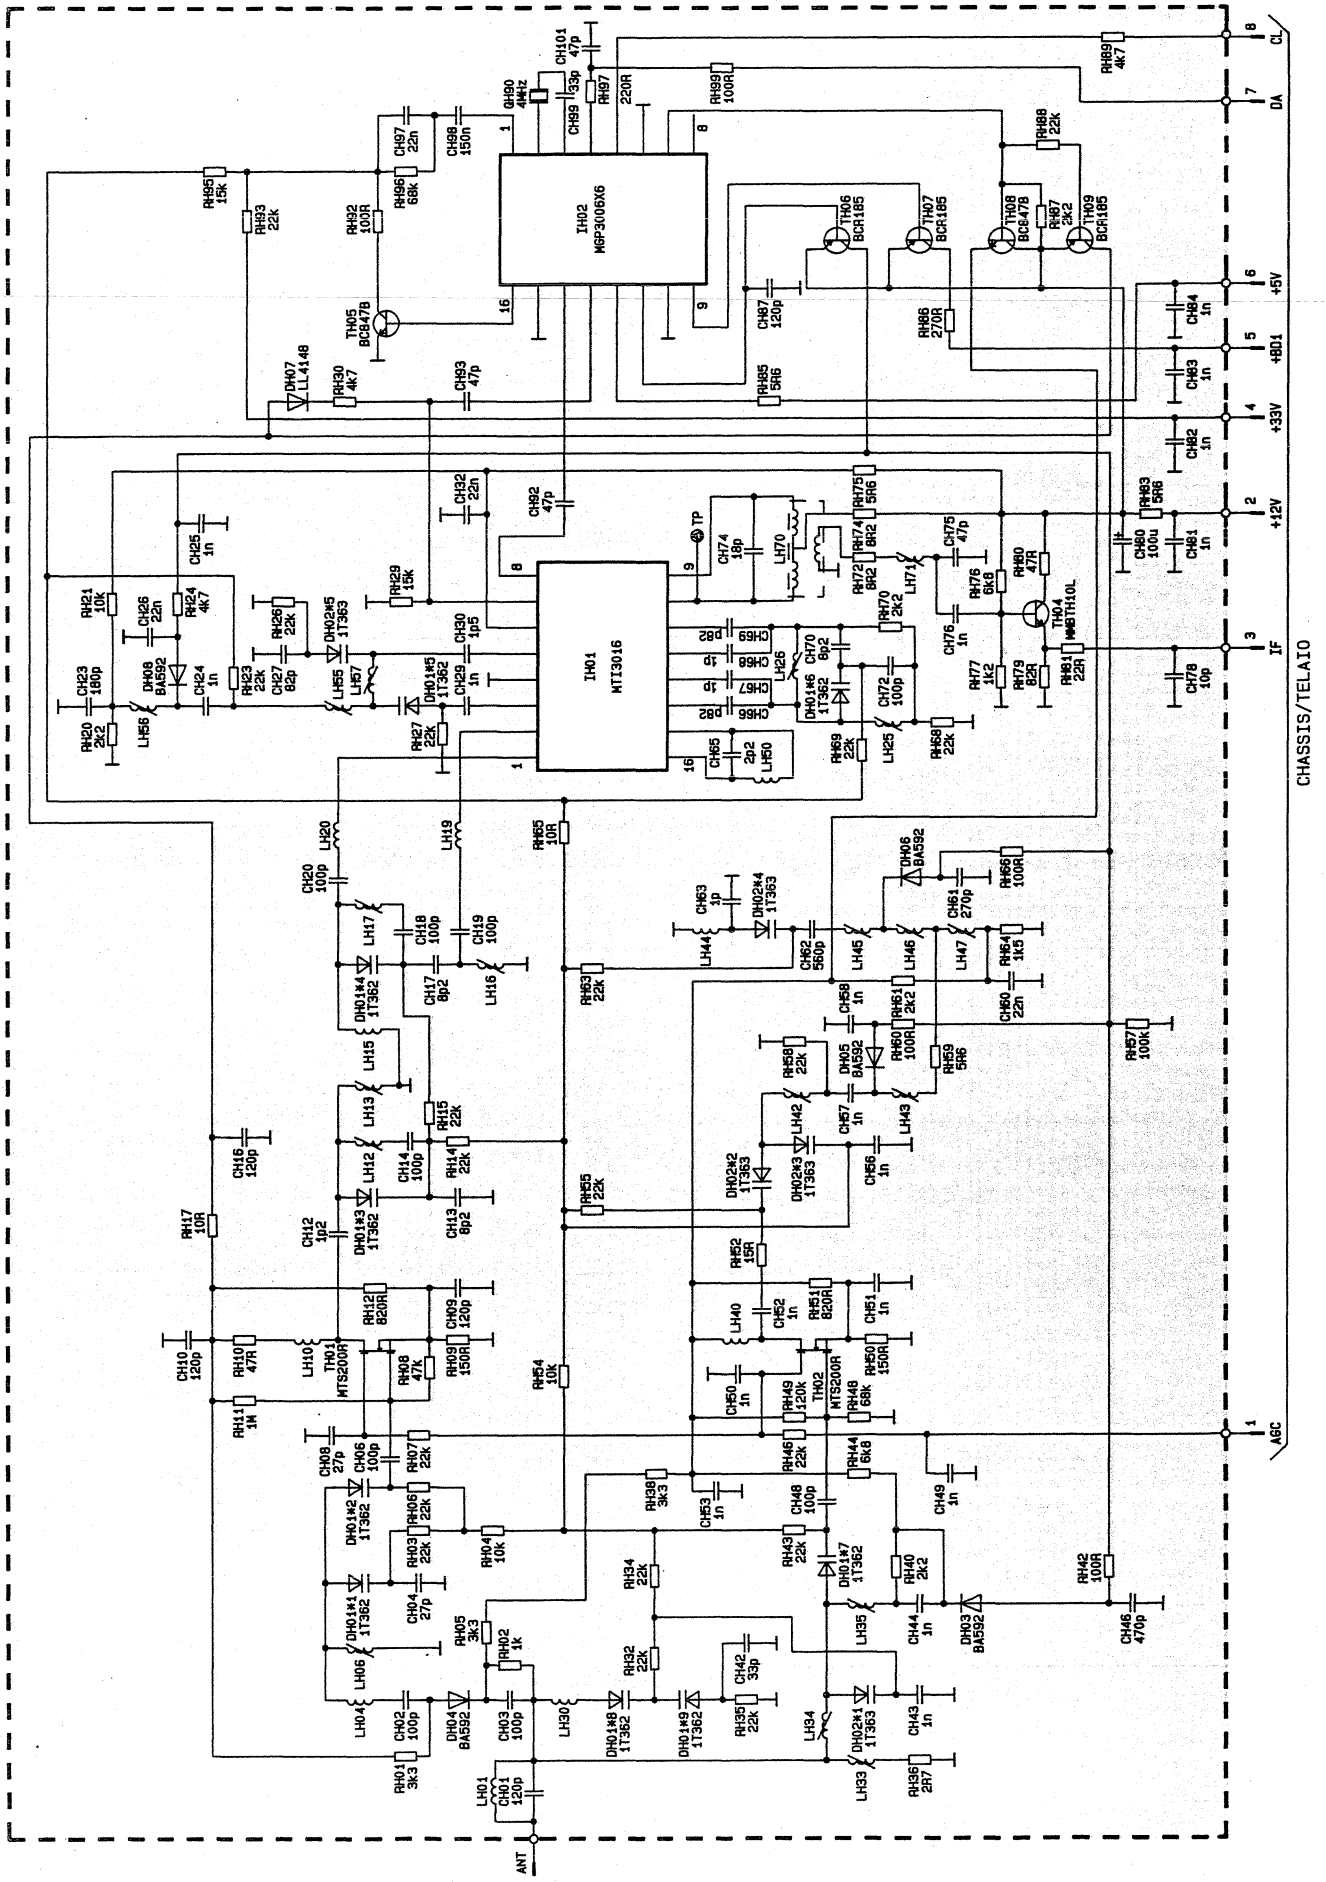
IH01
MT3016
IH02
M6P3006X6
TH01
MTS200R
TH02
MTS200R
TH04
M6BTH10L
TH05
BC847B
TH06
BCR185
TH07
BCR185
TH08
BC847B
TH09
BCR185
DH04
BA592
DH05
BA592
DH06
BA592
DH07
LL4148
DH08
BA592
CHASSIS/TELAIO
ANT
AGC
IF
+12V
+33V
+5V
DA
CL

ZF-Verstärker IF 2139 · IF Amplifier · Amplificateur FI · Amplificatore FI · Amplificador F

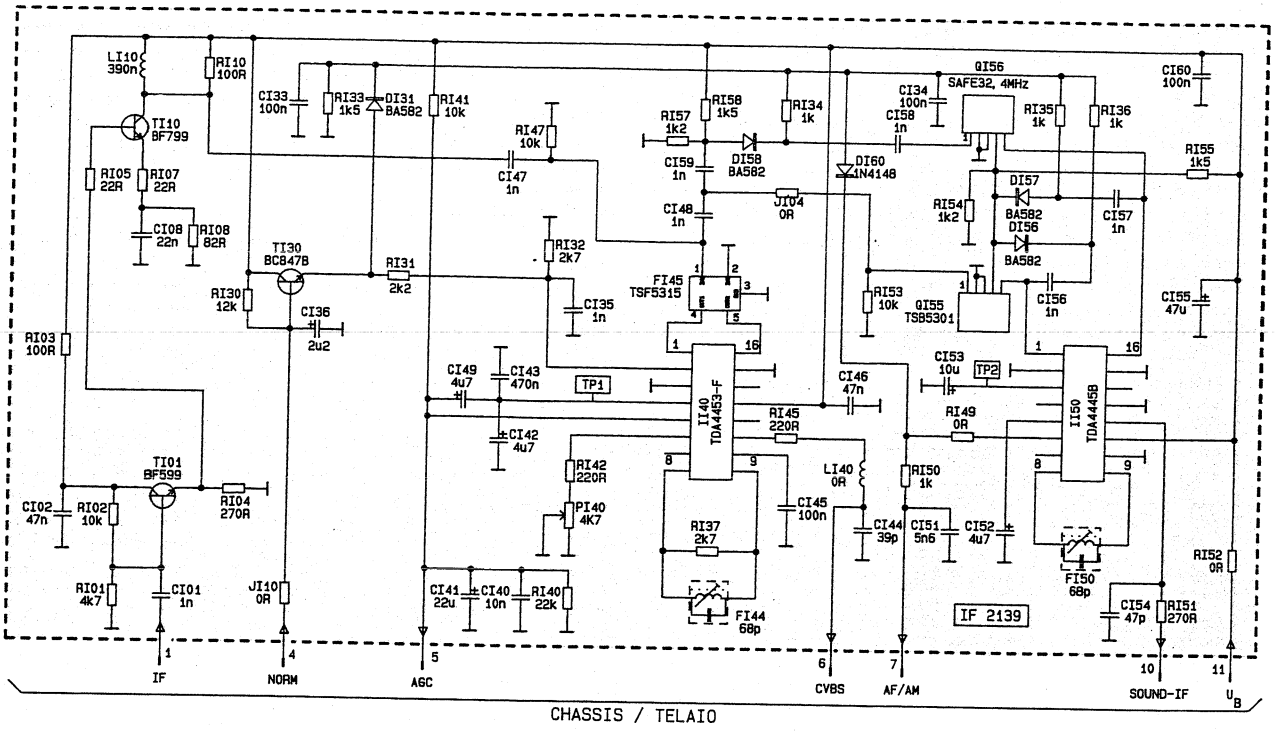

ZF-Verstärker IF 2332 · IF Amplifier · Amplificateur FI · Amplificatore FI · Amplificador F

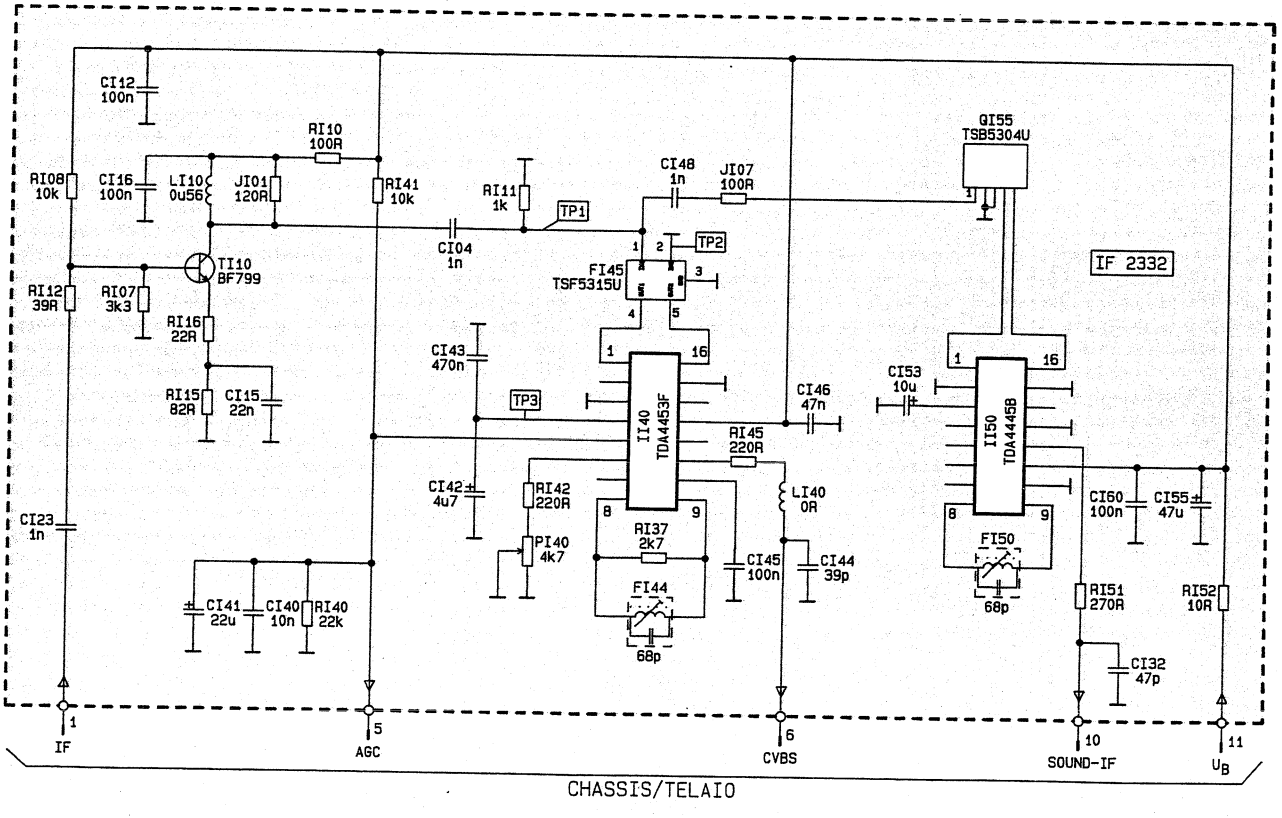

Ersatzteile · Spare parts list · Liste de pièces de rechange · Lista parti di ricambio Lista de piezas de recambio

Wichtig: Bei Ersatzteilbestellungen bitte unbedingt die entsprechende Bestellnummer angeben!
N. B.: When demanding Spare Parts it is absolutely necessary to quote the corresponding part number!
Important: Lors d'une commande de pièces de rechange, prière d'indiquer et tout cas le numéro de la pièce!
Importante: Ordinare sempre con il numero correspondenti di codice!
Importante: Pedir siempre lis recambios con el numero correspondiente codigo!

Pos.	Art.-Nr. Part No.	Bezeichnung	Part
		MODULE/AUSTAUSCHTEILE:	**EXCHANGE PARTS:**
AMFM8315	349.354.403	AMFM8315U LTP TON-MODUL	AMFM8315U PCB SOUND
CDI8000	349.354.409	CDI8000U LTP CUT-OFF	CDI8000U PCB CUT-OFF
DVT2013	349.353.983	DVT2013U LTP VIDEOTEXT	DVT2013U PCB TELETEXT
DVT7000	593.753	DVT7000U LTP VIDEOTEXT	DVT7000U PCB TELETEXT
IF2132	349.354.303	IF2132 ZF-VERSTÄRKER	IF2132 UNIT, IF
IF2139	349.354.322	IF2139 ZF-VERSTÄRKER	IF2139 UNIT, IF
IF2332	101.299.00	IF2332 ZF-VERSTÄRKER	IF2332 UNIT, IF
IF2339	101.298.40	IF2339 ZF-VERSTÄRKER	IF2339 UNIT
MTP2015	349.357.098	MTP-MM2015 TUNER (Hyperband)	MTP-MM2015 TUNER
MTP4015	101.112.10	MTP4015 TUNER	MTP4015 TUNER
SCI7040	349.378.174	SCI7040U LTP SCHNITTSTELLE	SCI7040U PCB INTERFACE
		BAUGRUPPEN(KEIN AUSTAUSCH):	**MODULES:**
CRT8011	490.007.9966	CRT8011 LTP BILDROHRANSCHLUSS	CRT8011 PCB CRT-SOCKET
CRT8050	490.007.8790	CRT8050 LTP BILDROHRANSCHLUSS	CRT8050 PCB CRT-SOCKET
CRT8090	110.073.95	CRT8090 LTP BILDROHRANSCHLUSS	CRT8090 P.C.B. CRT-SOCKET
DFH7062	490.007.8825	DFH7062 LTP SUBMODUL	DFH7062 SUB P.C.B.
LDN8006	250.569.10	LDN8006 LTP FREQUENZWEICHE	P.C.B., FREQ. DIVIDER NETWORK
VIDEO	490.007.9938	VIDEO/8110 BG-SVHS	VIDEO/8110 PCB SUB
VIDEO	490.007.9944	VIDEO/8310 BGL-SVHS SUB MODUL	VIDEO/8310 PCB SUB
VTR7030	243.361	VTR7030 LTP SUBMODUL	VTR7030 SUB P.C.B.
		CHASSIS-TEILE	**CHASSIS PARTS**
BE001	239.055	Stiftgehäuse, 16polig, natur UF	16 pin contact housing
BR001	309.650.061	Stiftleiste, 3polig, rot UF	Contact strip, 3-pole, red
BR002	260.789	Stiftleiste, 12polig, schwarz	Contact strip, 12-pole, black
BR003	243.597	Stiftleiste, 5polig, UF	Contact strip, 5-pole
BR004	243.598	Stiftleiste, 7polig, natur UF	7 pin wafer
BS006	266.713	Stiftleiste, 4polig, schwarz	Contact strip, 4-pole, black
BV011	309.650.064	Stiftleiste, 10polig, natur UF	Contact strip, 10-pole
CA019	252.475	10UF 16V Elko Bipolar	10UF 16V E cap
CL007	207TX3126	0U01F 400V 5% Kondensator	0U01F 400V 5% Capacitor
CL009	239.094	100UF 100V 10% Elko	100UF 100V 10% E cap
CL011	239.322	10UF 250V 20% Elko	10UF 250V 20% E cap
CL013	256.729	330PF 400V 10% Keramik-Kondensator	330PF 400V 10% C cap
CL021	309.433.764	11NF 1K6V 3,5% Filmkondensator	11NF 1K6V 3,5% Film cap
CL021	309.433.771	11N5F 1K6V 3,5% KPS-Kondensator	11N5F 1K6V 3,5% Film cap
CL021	490.007.9641	6N1F 1K6V 3,5% Filmkondensator	6N1F 1K6V 3,5% Film cap
CL022	266.728	12NF 400V 5% Filmkondensator	12NF 400V 5% Film cap
CL022	309.433.772	20NF 400V 5% MKP-Kondensator	20NF 400V 5% MKPoly cap
CL023	239.096	3N3F 400V 10% MP-Kondensator	3N3F 400V 10% MPoly cap
CL024	243.539	1UF 250V 10% MP-Kondensator	1UF 250V 10% MPoly cap
CL024	309.433.765	440NF 250V 5% Filmkondensator	440NF 250V 5% Film cap
CL024	309.433.768	390NF 250V 10% Filmkondensator	390NF 250V 10% Film cap
CL025	256.728	1UF 160V Elko	1UF 160V E cap
CL026	246.576	2U2F 160V Elko	2U2F 160V E cap
CL028	207TX2633	330NF 100V 10% MP-Kondensator	330NF 100V 10% MPoly cap
CP001	252.320	0U1F 275V 20% MP-Kondensator	0U1F 275V 20% MPoly cap
CP003	100.587.40	4N7F 1KV Keramik-Kondensator	4N7F 1KV C cap
CP004	100.587.40	4N7F 1KV Keramik-Kondensator	4N7F 1KV C cap
CP006	309.418.404	150UF 385V Elko	150UF 385V E cap
CP006	490.007.9642	100UF 385V 20% Elko	100UF 385V 20% E cap
CP011	309.442.972	1N5F 1KV Keramik-Kondensator	1N5F 1KV C cap
CP024	239.137	47UF 100V 20% Elko	47UF 100V 20% E cap
CP025	309.441.640	4N7F 400V 20% Keramik-Kondensator	4N7F 400V 20% C cap
CP029	266.245	2N2F 1KV 20% MPP-Kondensator	2N2F 1KV 20% MPoly cap
CP050	266.247	100PF 1KV 20% Keramik-Kondensator	100PF 1KV 20% C cap
CP051	309.419.428	150UF 200V Elko	150UF 200V E cap
CP062	256.729	330PF 400V 10% Keramik-Kondensator	330PF 400V 10% C cap
CP063	256.852	470PF 400V 10% Keramik-Kondensator	470PF 400V 10% C cap
CW001	100.779.60	510N0F 250V 5% Filmkondensator	510N0F 250V 5% Film cap
CW002	256.728	1UF 160V Elko	1UF 160V E cap
CW005	207TX2219	47NF 250V 10% Filmkondensator	47NF 250V 10% Film cap
DA017	309.325.927	1N4148 Diode	1N4148 Diode
DA045	309.327.135	ZPY39 1,3W 2% ZENER Diode	ZPY39 1,3W 2% ZENER Diode
DF015	309.325.927	1N4148 Diode	1N4148 Diode
DF016	309.325.056	BA157 Diode SSW	BA157 Diode
DF017	309.325.056	BA157 Diode SSW	BA157 Diode
DF018	309.325.179	BAV21 Diode	BAV21 Diode
DF019	309.325.179	BAV21 Diode	BAV21 Diode

Pos.	Art.-Nr. Part No.	Bezeichnung	Part
DG001	464.371	ZPD5,1 ZENER Diode	ZPD5,1 ZENER Diode
DG010	464.452	1N4148 Diode	1N4148 Diode
DH002	256.421	ZPD5V1 ZENER Diode	ZPD5V1 ZENER Diode
DH004	309.325.172	ZPD33V 0,5W 2% ZENER Diode	ZPD33V 0,5W 2% ZENER Diode
DL000	256.333	ZPD33V 0,5W 2% ZENER Diode	ZPD33V 0,5W 2% ZENER Diode
DL009	309.325.056	BA157 Diode SSW	BA157 Diode
DL011	309.325.056	BA157 Diode SSW	BA157 Diode
DL013	266.534	BY397 Diode	BY397 Diode
DL016	309.325.927	1N4148 Diode	1N4148 Diode
DL017	309.325.927	1N4148 Diode	1N4148 Diode
DL018	309.325.927	1N4148 Diode	1N4148 Diode
DL021	266.829	BY228 Diode mit Lötstift	BY228 Diode
DL022	266.280	BYW76 Diode	BYW76 Diode
DL026	309.325.056	BA157 Diode SSW	BA157 Diode
DL040	464.597	ZPD13 ZENER Diode	ZPD13 ZENER Diode
DL041	464.387	ZPD2,7 ZENER Diode	ZPD2,7 ZENER Diode
DL042	309.325.927	1N4148 Diode	1N4148 Diode
DL046	256.736	ZPD9V1 ZENER Diode	ZPD9V1 ZENER Diode
DP001	309.325.163	BY255 Diode	BY255 Diode
DP002	309.325.163	BY255 Diode	BY255 Diode
DP003	309.325.163	BY255 Diode	BY255 Diode
DP004	309.325.163	BY255 Diode	BY255 Diode
DP017	309.325.056	BA157 Diode SSW	BA157 Diode
DP019	309.325.056	BA157 Diode SSW	BA157 Diode
DP024	273TX0025	1N4001 Diode	1N4001 Diode
DP026	273TX0025	1N4001 Diode	1N4001 Diode
DP027	273TX0025	1N4001 Diode	1N4001 Diode
DP028	309.325.056	BA157 Diode SSW	BA157 Diode
DP030	309.325.056	BA157 Diode SSW	BA157 Diode
DP031	339.529.958	BYT13-600 Diode	BYT13-600 Diode
DP050	266.047	BY399S Diode	BY399S Diode
DP054	309.325.927	1N4148 Diode	1N4148 Diode
DP055	273.434	BZX55B5V1 ZENER Diode	BZX55B5V1 ZENER Diode
DP057	309.325.927	1N4148 Diode	1N4148 Diode
DP058	309.325.927	1N4148 Diode	1N4148 Diode
DP063	256.298	BYW72 Diode	BYW72 Diode
DP065	266.534	BY397 Diode	BY397 Diode
DP066	266.534	BY397 Diode	BY397 Diode
DP067	309.325.927	1N4148 Diode	1N4148 Diode
DP068	309.325.927	1N4148 Diode	1N4148 Diode
DP069	309.325.179	BAV21 Diode	BAV21 Diode
DP070	309.325.179	BAV21 Diode	BAV21 Diode
DR051	309.325.927	1N4148 Diode	1N4148 Diode
DR060	309.325.927	1N4148 Diode	1N4148 Diode
DR061	256.418	BZX55C5V1 ZENER Diode	BZX55C5V1 ZENER Diode
DR062	256.418	BZX55C5V1 ZENER Diode	BZX55C5V1 ZENER Diode
DR078	256.299	ZPD5,6 0,5W 2% ZENER Diode	ZPD5,6 0,5W 2% ZENER Diode
DV001	309.325.927	1N4148 Diode	1N4148 Diode
DV002	309.325.122	BZX55C18 Z-Diode	BZX55C18 Z-Diode
DV003	309.325.927	1N4148 Diode	1N4148 Diode
DV008	351.102.3000	BZX55C13V, Diode	BZX55C13V, Diode
DV047	309.325.927	1N4148 Diode	1N4148 Diode
DV076	256.418	BZX55C5V1 ZENER Diode	BZX55C5V1 ZENER Diode
DV081	309.325.927	1N4148 Diode	1N4148 Diode
DW001	309.325.927	1N4148 Diode	1N4148 Diode
DW002	309.325.056	BA157 Diode SSW	BA157 Diode
DX020	309.325.927	1N4148 Diode	1N4148 Diode
FPA01	309.627.508	T 1,6A Sicherung	T 1,6A Fuse
IA005	309.368.547	TDA2030A44 20W IC	TDA2030A44 IC
IA005	849.380.0017	Montageclip	Clip metal
IA025	309.368.547	TDA2030A44 20W IC	TDA2030A44 IC
IA025	849.380.0017	Montageclip	Clip metal
IF001	252.593	Silikonscheibe	Silicon plate
IF001	309.368.548	TDA8178FS IC	TDA8178FS IC
IF001	849.380.0017	Montageclip	Clip metal
IP001	309.368.549	TEA2261 IC	TEA2261 IC
IR001	309.368.970	ST6395B1/NX ICC8-B35 IC	ST6395B1/NX ICC8-B35 IC
IR001	309.689.966	IC-Fassung, 42polig	IC socket, 42pole
IR001	490.007.9936	ST6395B1/NL ICC8-B33 IC	ST6395B1/NL IC
IV001	256.390	TA8659N IC	TA8659N IC
LC003	339.349.053	47UH Drossel	47UH Choke coil
LC007	339.349.053	47UH Drossel	47UH Choke coil
LC013	309.249.328	27U5H 4M43HZ 7X7 Filter	27U5H 4M43HZ 7X7 Filter
LC017	309.249.328	27U5H 4M43HZ 7X7 Filter	27U5H 4M43HZ 7X7 Filter
LC023	309.249.329	6U4H 4M286HZ Filter	6U4H 4M286HZ Filter
LC024	339.349.563	56UH Drossel	56UH Choke coil
LC028	266.408	10UH Drossel	10UH Choke coil
LC043	243.053	10UH Filter	10UH Filter
LC044	426.035	8U2H 10% Drossel	8U2H 10% Choke
LC054	309.249.369	27U5H Filter	27U5H Filter
LC069	426.035	8U2H 10% Drossel	8U2H 10% Choke
LI062	309.250.001	27UH 5% Drossel	27UH 5% Choke coil
LL005	309.311.979	Diodensplit-Trafo, (25/28"-110")	Diode split transformer (25/28"-110")
LL005	490.007.9643	Diodensplit-Trafo (21"/90")	Diode split transformer (21"/90")
LL016	309.250.964	50UH 15% Drossel	50UH 15% Choke

Pos.	Art.-Nr. Part No.	Bezeichnung	Part
LL019	309.309.987	Treibertransformator	Driver transformer
LL023	101.069.70	70UH 4% Drossel	70UH 4% Choke coil
LL023	266.635	83UH 5% Drossel	83UH 5% Choke coil
LL026	309.249.327	30UH Spule, H-Linearität	30UH H-Linearity coil
LL026	387.723.0000	80UH 15% Spule, H-Linearität	80UH 15% H-Linearity coil
LP001	309.259.011	Siebdrossel	Filter choke
LP028	387.721.8000	4UH 10% Spule	4UH 10% Coil
LP036	101.117.90	Trafo, Schaltnetzteil (25/28"-110°)	Switched mode power transformer
LP036	490.007.9644	Trafo, Schaltnetzteil (21"/90°)	Switched mode power transformer
LP042	261.824	Impulsübertrager	Pulse transformer
LP070	266.189	6U8H 10% Drossel	6U8H 10% Choke
LP070	276.155	15R 0,3W 5% Sicherheitswiderstand	15R 0,3W 5% Fusible resistor
LR003	309.249.375	35UH Spule	35UH Coil
LV049	339.349.763	27UH 5% Drossel	27UH 5% Choke coil
LV051	339.349.718	27UH Spule	27UH Coil
LV052	339.349.763	27UH 5% Drossel	27UH 5% Choke coil
LV064	256.493	22UH 10% Drossel	22UH 10% Choke
LW001	100.889.70	5M5HZ 7X7 Filter	5M5HZ 7X7 Filter
LW002	309.249.328	27U5H 4M43HZ 7X7 Filter	27U5H 4M43HZ 7X7 Filter
LW003	246.756	10UH 10% Drossel	10UH 10% Choke coil
LW004	243.713	12UH 5% Drossel	12UH 5% Choke coil
LW009	309.249.328	27U5H 4M43HZ 7X7 Filter	27U5H 4M43HZ 7X7 Filter
PC044	276.793	220R Trimmwiderstand	220R Trimmer resistor
PF004	309.639.036	Drehschalter	Rotary switch
PF011	309.509.167	220R Trimmwiderstand	220R Trimmer resistor
PG001	309.509.133	2K2R 20% Trimmwiderstand, V	2K2R 20% Trimmer resistor
PG004	309.509.133	2K2R 20% Trimmwiderstand, V	2K2R 20% Trimmer resistor
PL039	309.509.159	470R 20% Trimmwiderstand, H	470R 20% Trimmer resistor
PP052	407.750	470R Trimmwiderstand	470R Trimmer resistor
PV058	309.509.126	10KR 20% Trimmwiderstand, liegend	10KR 20% Trimmer resistor
PV079	339.509.530	1KR 20% Trimmwiderstand, H	1KR 20% Trimmer resistor
QC066	468.031	4,433619MHz Quarz	4,433619MHz Crystal
QL045	309.160.840	CSB503B Keramikfilter	CSB503B Ceramic filter
QR001	309.335.715	8M0HZ Quarz	8M0HZ Crystal
RA009	256.732	1R8 0,3W 5% Sicherheitswiderstand	1R8 0,3W 5% Fusible resistor
RA029	256.732	1R8 0,3W 5% Sicherheitswiderstand	1R8 0,3W 5% Fusible resistor
RC009	309.580.955	22R 0,3W 5% Sicherheitswiderstand	22R 0,3W 5% Fusible resistor
RF004	309.534.669	220R 0,7W 2% Metallfilmwiderstand	220R 0,7W 2% Metal film resistor
RF007	309.532.665	1M5R 0,25W 2% Metallfilmwiderstand	1M5R 0,25W 2% Metal film resistor
RF012	309.580.955	22R 0,3W 5% Sicherheitswiderstand	22R 0,3W 5% Fusible resistor
RF019	243.536	820R 0,4W 2% Metallfilmwiderstand	820R 0,4W 2% Metal film resistor
RF020	246.457	1K5R 0,4W 1% Metallfilmwiderstand	1K5R 0,4W 1% Metal film resistor
RF021	239.087	0R68 0,7W 10% Metalloxydwiderstand	0R68 0,7W 10% Metal oxide resistor
RF023	243.743	1R5 0,5W 5% Sicherheitswiderstand	1R5 0,5W 5% Fusible resistor
RH001	253.747	5R6 0,3W 5% Sicherheitswiderstand	5R6 0,3W 5% Fusible resistor
RH001	309.580.955	22R 0,3W 5% Sicherheitswiderstand	22R 0,3W 5% Fusible resistor
RH002	256.722	82R 2,24W 5% Drahtwiderstand	82R 2,24W 5% Wire resistor
RI015	339.537.716	10R 0,3W 5% Sicherheitswiderstand	10R 0,3W 5% Fusible resistor
RL005	413.087.09	113KR 0,4W 1% Metallfilmwiderstand	113KR 0,4W 1% Metal film resistor
RL011	243.950	15R 0,5W 5% Sicherheitswiderstand	15R 0,5W 5% Fusible resistor
RL012	309.556.277	4K7R 3W 5% Drahtwiderstand	4K7R 3W 5% Wire resistor
RL018	309.556.278	270R 3W 5% Drahtwiderstand	270R 3W 5% Wire resistor
RL021	309.556.275	0R68 3W 5% Drahtwiderstand	0R68 3W 5% Wire resistor
RL021	490.007.9645	1R 3W 5% Drahtwiderstand	1R 3W 5% Wire resistor
RL023	309.556.280	22R 3W 5% Drahtwiderstand	22R 3W 5% Wire resistor
RL023	703.740.00	39R 3W 5% Drahtwiderstand	39R 3W 5% Wire resistor
RL025	309.580.971	2K2R 0,5W 5% Sicherheitswiderstand	2K2R 0,5W 5% Fusible resistor
RL026	239.091	1KR 0,5W 5% Sicherheitswiderstand	1KR 0,5W 5% Fusible resistor
RL027	309.580.970	56R 0,3W 5% Sicherheitswiderstand	56R 0,3W 5% Fusible resistor
RL028	309.556.262	100R 3W 5% Drahtwiderstand	100R 3W 5% Wire resistor
RL030	246.355	0R56 0,5W 5% Metalloxydwiderstand	0R56 0,5W 5% Metal oxide resistor
RL030	490.007.9647	0R18 0,7W 10% Metalloxydwiderstand	0R18 0,7W 10% Metal oxide resistor
RL042	339.529.957	ZPD24 ZENER Diode	ZPD24 ZENER Diode
RP001	246.454	1R2 7W 10% Drahtwiderstand	1R2 7W 10% Wire resistor
RP002	246.454	1R2 7W 10% Drahtwiderstand	1R2 7W 10% Wire resistor
RP005	309.560.952	25R PTC-Widerstand	25R PTC resistor
RP006	490.007.9648	27KR 4W 5% Metalloxydwiderstand	27KR 4W 5% Metal oxide resistor
RP018	256.930	22R 2W 5% Metalloxydwiderstand	22R 2W 5% Metal oxide resistor
RP018	309.556.312	18R 2W 5% Metalloxydwiderstand	18R 2W 5% Metal oxide resistor
RP025	406.517	10MR 0,7W 5% Schichtwiderstand	10MR 0,7W 5% Film resistor
RP031	246.455	150R 9W 5% Drahtwiderstand	150R 9W 5% Wire resistor
RP033	246.455	150R 9W 5% Drahtwiderstand	150R 9W 5% Wire resistor

Pos.	Art.-Nr. Part No.	Bezeichnung	Part
RP051	309.541.641	88K7R 0,4W 1% Metallfilmwiderstand	88K7R 0,4W 1% Metal film resistor
RP062	239.350	0R1 2W 10% Drahtwiderstand	0R1 2W 10% Wire resistor
RP062	242.019	0R1 0,4W 10% Sicherheitswiderstand	0R1 0,4W 10% Fusible resistor
RR000	309.561.933	100KRx4 125MW 5% Widerstandsnetzwerk	100KRx4 125MW 5% Resistor netw.
RR081	309.580.983	220R 0,3W 5% Sicherheitswiderstand	220R 0,3W 5% Fusible resistor
RV020	309.580.974	0R1 0,4W 10% Sicherheitswiderstand	0R1 0,4W 10% Fusible resistor
RV072	309.580.955	22R 0,3W 5% Sicherheitswiderstand	22R 0,3W 5% Fusible resistor
RW001	339.537.716	10R 0,3W 5% Sicherheitswiderstand	10R 0,3W 5% Fusible resistor
RW002	101.202.40	4K7R 0,7W 5% Sicherheitswiderstand, NB	4K7R 0,7W 5% Fusible resistor
SV001	490.007.9938	VIDEO/8110 BG-SVHS	VIDEO/8110 PCB SUB
TA015	463.223	BC548C Transistor	BC548C Transistor
TA045	243.712	ON4771/BD242B Transistor	ON4771/BD242B Transistor
TA045	261.827	Montageclip	Clip
TC034	309.001.293	BC548B Transistor	BC548B Transistor
TF007	463.223	BC548C Transistor	BC548C Transistor
TF008	309.001.293	BC548B Transistor	BC548B Transistor
TF016	465.913	BF422 Transistor	BF422 Transistor
TF025	309.001.293	BC548B Transistor	BC548B Transistor
TI061	309.001.292	BC558C Transistor	BC558C Transistor
TI062	309.001.226	BC558B Transistor	BC558B Transistor
TL017	309.001.350	BSR51 Transistor	BSR51 Transistor
TL019	261.825	Montageclip 1	Clip 1
TL019	309.005.021	2SD1546 Transistor	2SD1546 Transistor
TL019	309.005.026	S2055AF Transistor	S2055AF Transistor
TM003	309.001.292	BC558C Transistor	BC558C Transistor
TM012	266.430	BC558/A* Transistor selektiert	BC558/A* Transistor
TM016	309.001.293	BC548B Transistor	BC548B Transistor
TM018	309.001.292	BC558C Transistor	BC558C Transistor
TP020	463.223	BC548C Transistor	BC548C Transistor
TP025	309.001.293	BC548B Transistor	BC548B Transistor
TP029	309.001.390	BUH713 Transistor	BUH713 Transistor
TP029	309.005.029	BUH515 Transistor	BUH515 Transistor
TP029	309.903.834	Montageclip	Clip metal
TP053	309.001.226	BC558B Transistor	BC558B Transistor
TP054	309.001.226	BC558B Transistor	BC558B Transistor
TP069	309.001.325	BC547C Transistor	BC547C Transistor
TR016	309.001.293	BC548B Transistor	BC548B Transistor
TR017	309.001.226	BC558B Transistor	BC558B Transistor
TR018	352.113.3000	BC636 Transistor	BC636 Transistor
TR063	309.001.226	BC558B Transistor	BC558B Transistor
TR076	309.001.226	BC558B Transistor	BC558B Transistor
TR077	309.001.293	BC548B Transistor	BC548B Transistor
TR082	339.556.900	BC635 Transistor	BC635 Transistor
TV001	309.001.292	BC558C Transistor	BC558C Transistor
TV002	463.223	BC548C Transistor	BC548C Transistor
TV029	309.001.293	BC548B Transistor	BC548B Transistor
TW001	309.001.292	BC558C Transistor	BC558C Transistor
TW002	463.223	BC548C Transistor	BC548C Transistor
TW003	463.223	BC548C Transistor	BC548C Transistor
TW004	309.001.292	BC558C Transistor	BC558C Transistor
TW005	309.001.292	BC558C Transistor	BC558C Transistor
VC043	309.699.270	SDL145S / DL711 Verzögerungsleitung	Delay line
VW001	490.007.9939	SDL102151A-4102-01 Verzögerungsleitung	SDL102151A-4102-01 Delay line
	243.540	Strebe für Chassis	Chassis support
	243.541	Schutzkappe, Netzteil	Protection cap
		Weitere gerätespezifische Ersatzteile lieferbar.	**Further spare parts are available.**

Diese Angaben und Hinweise sind ausschließlich für den Service des Fachhändlers bestimmt · Änderungen vorbehalten · Sämtliche Urheberrechte an diesen Texten und Zeichnungen stehen uns zu. Nachdrucke, Vervielfältigung – auch auszugsweise – nur mit unserer vorherigen Zustimmung zulässig. Alle Rechte vorbehalten · Questi dati e queste istruziono sono riservati ai tecnici del servizio assistenza · Con riserva di modifiche · These instructions are for service dealers only · Subject to modification.

Änderungen vorbehalten · Subject to change · Modifications réservées · Con riserva di modifiche · Reservado derecho de modificacion

Thomson Consumer Electronics GmbH & Co. oHG
– Service –
Göttinger Chaussee 76
30453 Hannover (Germany)

Bestell-Nr. 102.703.20 9406 / Doku